


TITLE: M12 A CODE ASS.TYPE SOLDER FEMALE 5P 4A

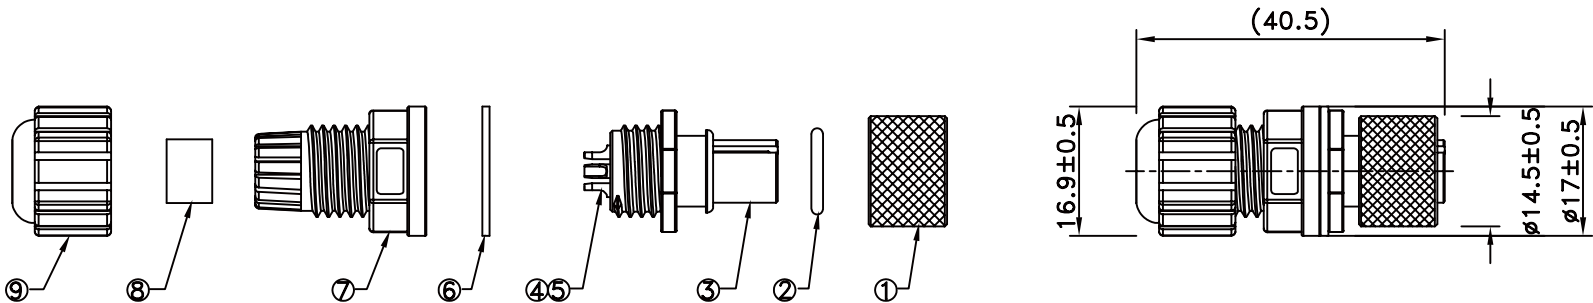

**NOTES:

1. SCREW NUT: COPPER ALLOY NICKEL PLATED.
2. O-RING: SILICON UL94 V-0 RED COLOR.
3. HOUSING: THERMAL PLASTIC UL94 V-0 BLACK COLOR.
4. CONTACTS: COPPER ALLOY Au PLATED.
5. GLUE: EPOXY BLACK COLOR.
6. GASKET: SILICON UL94 V-0 BLACK COLOR.
7. COVER: THERMAL PLASTIC UL94 V-0 BLACK COLOR.
8. GLAND: SILICON UL94 V-0 BLACK COLOR.
9. GLAND NUT: THERMAL PLASTIC UL94 V-0 BLACK COLOR.
10. PROTECTION: IP 68.

REMARKS:

CABLE DIAMETER: 4.0 TO 7.0 mm.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12-SABK40-05-LF
SERIES | | | | LEADFREE
| | | | 05 WAY
| | | | LONG 40.5mm
| | | | BLACK
| | | | ASSEMBLY
| | | | FEMALE

DESCRIPTION: