



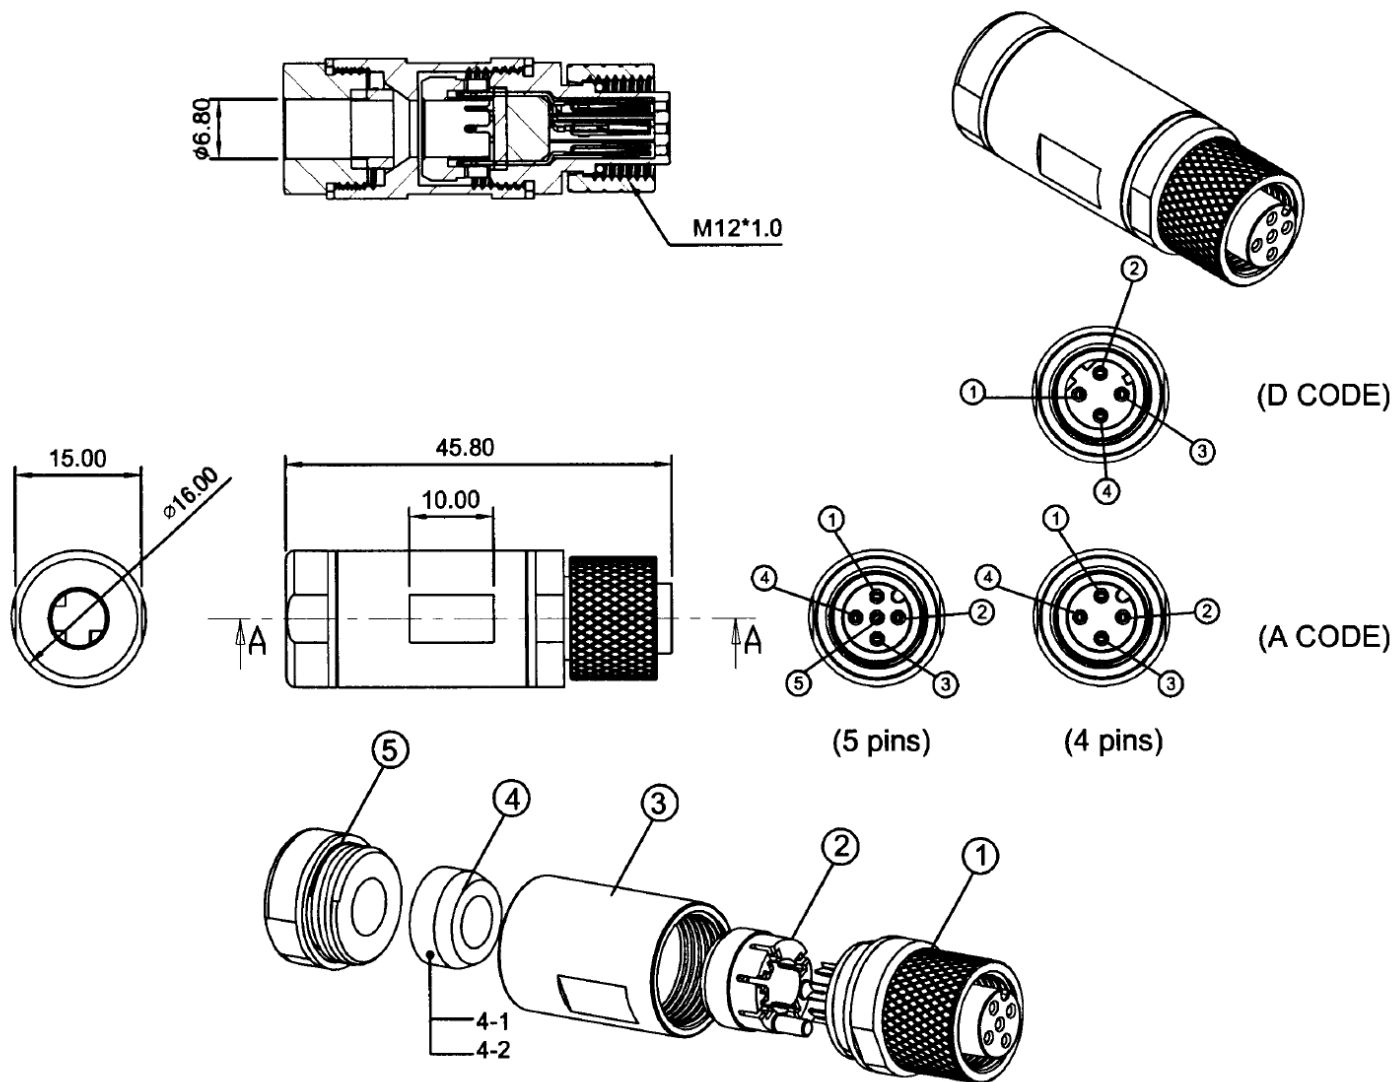

△ SPECIFICATION
MATERIAL
 Insulator: PA66, rated UL94V-0
 Contacts: Copper Alloy
 Contacts type: IDC type
 metal parts: steel with Ni plating
 Contacts plating
 Underplate: 50u"~100u" Nickel
 Contact area: 1u" gold
 Solder tails area: 100u"~200u" Ni
General Data
 Standard/Regulation: M12 connector IEC 61076-2-101
 Coding: A/D-standard
 Number of position: 4, 5 pin
 AWG Singal line: 22 AWG
 Current rating: 4 Amps max.
 Insulation resistance: 100 Mohms min @ 500 VDC
 Degree of protection: IP67
 Temperature range: -20°C TO +85°C
 Mating cycles: 100 insertions



MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

M12-SABK45-xx-LF
 SERIES LEADFREE
 04.04D.05.05D WAY
 LONG 45.8mm
 BLACK
 ASSEMBLY
 FEMALE

DESCRIPTION: