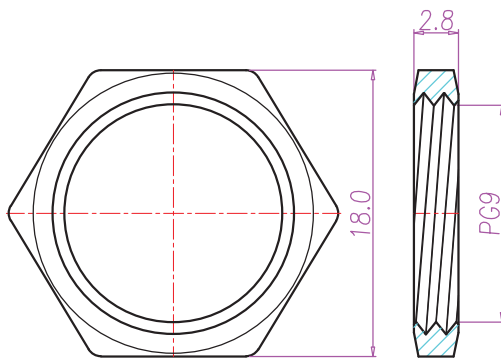
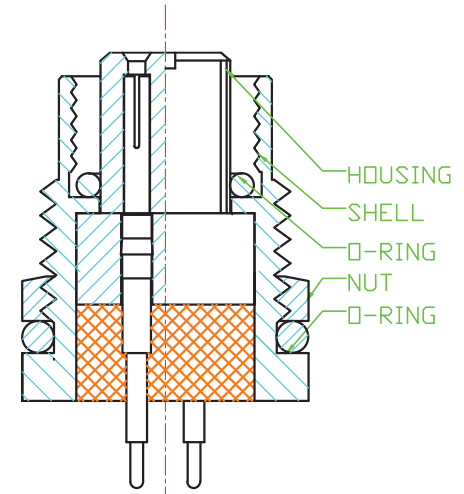
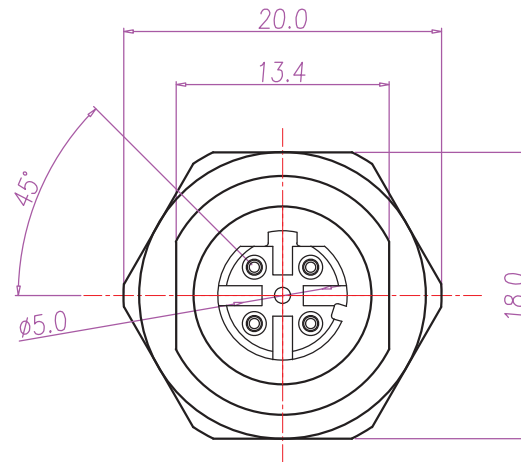
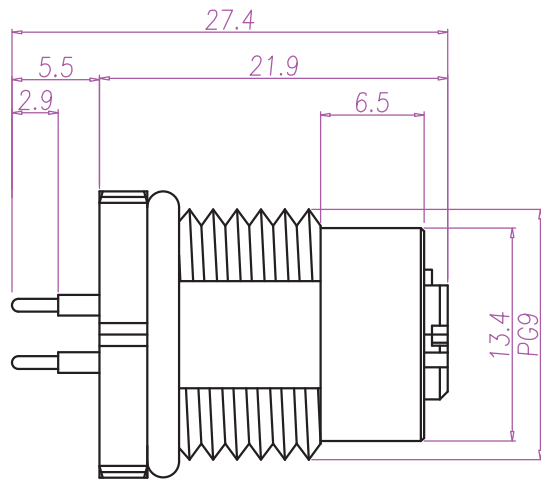


1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. SHELL : BRASS
 - 1-5. O-RING : EPDM
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED
 - 2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof: IPX7
4. Environmental :
 - 4-1. Operation Temperature : $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

NUT

RECOMMEND PANEL CUT-OUT RECOMMEND P.C.B LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$ 1°

PPOJECTION

照片框

ORDER INFORMATION

M12-SDPBNO-04D-LF
SERIES | | | | LEADFREE
FEMALE | | | | 04 WAY D TYPE
NUT | | | | O-RING
PANEL BACK
DIP 180°

DESCRIPTION: M12 4PIN(F) D型插板式(洗雙邊)+螺母PG9(雙邊倒角)