


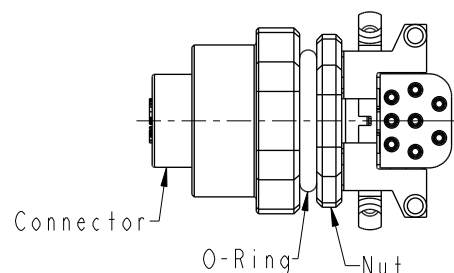
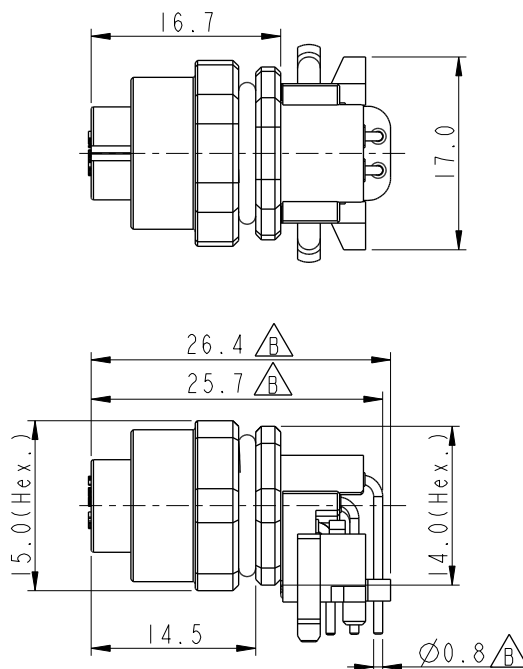


Recommended
Panel Cut-Out

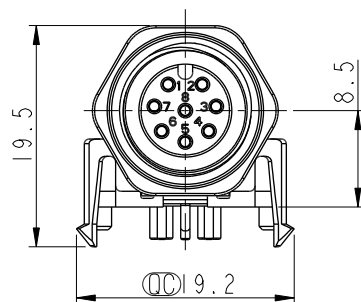

- △ Note:
- * RoHS Compliant
 - * ⌀ Important dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring1: Rubber, Black
 - O-Ring2: Rubber, Gray
 - Nut: Metal
 - * Nut: Metal
 - * O-Ring: Rubber, Gray
 - * For panel thickness max: 3.0mm
 - △ * For pcb thickness max: 1.6mm
 - * O-Ring and nut are assembled on connectors

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

M12-SRPBONLP-08-LF
SERIES | | | | | LEADFREE
FEMALE | | | | | 08 WAY
DIP 90° | | | | | LOCK+POST
NUT | | | | |
O-RING | | | | |
PANEL BACK

DESCRIPTION: N SEN, M12 A -SHLD, SCREW RECEPTACLE, F, F, PCB R