


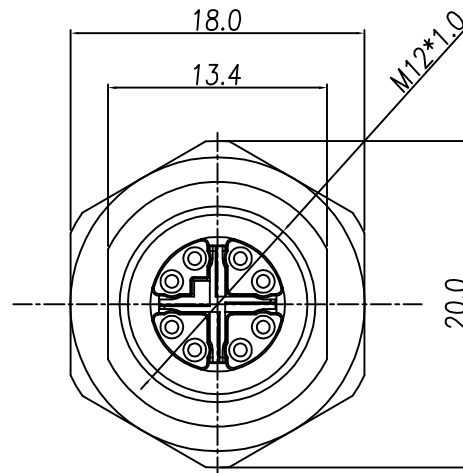


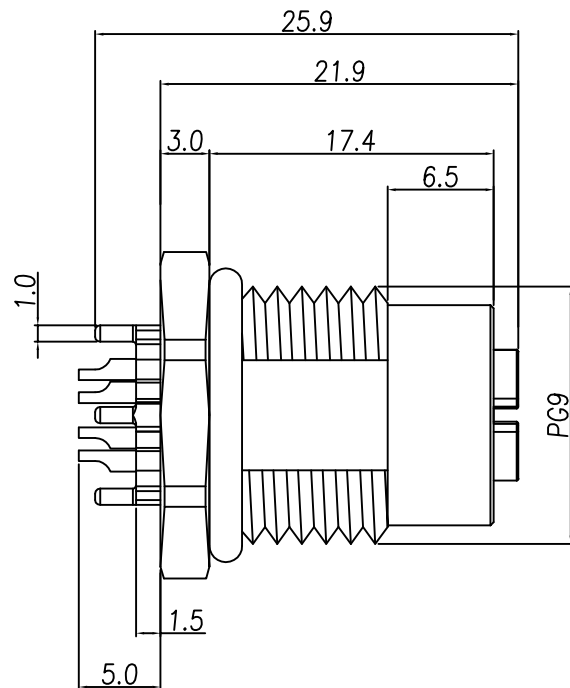


1. MATERIAL :
 - 1-1. HOUSING : PA66 UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : SEE TABLE A
 - 1-4. SHELL : SEE TABLE A
 - 1-5. O-RING : EPDM
 - 1-6. X-SHELL : Zn ALLOY
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. NUT : SEE TABLE A
 - 2-3. SHELL : SEE TABLE A
 - 2-4. X-SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 0.5A
 - 3-2. Rated Voltage : 50V AC/60V DC
 - 3-3. Water proof: IP67
4. Environmental :
 - 4-1. Operation Temperature : -40℃~85℃

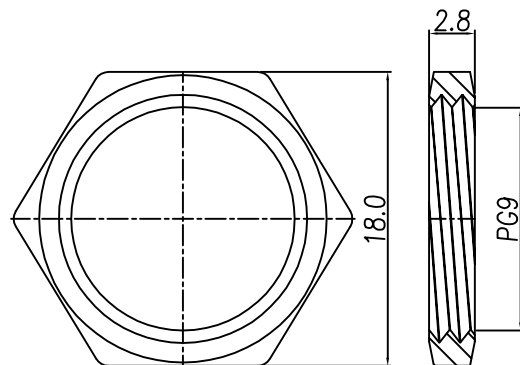

NUT



RECOMMEND PANEL CUT-OUT

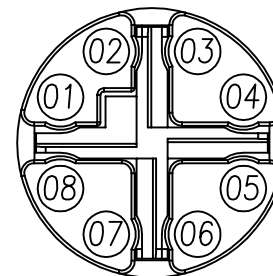

Pin Assignments

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

M12-SSPBNO-08X-LF
SERIES T T T LEADFREE
FEMALE RING 08WAY X-CODE
NUT
PANEL BACK
SOLDER

DESCRIPTION: 防水頭 M12 8PIN X-Code (F) 鉗鎖Pg9 焊線式(無溝槽)