


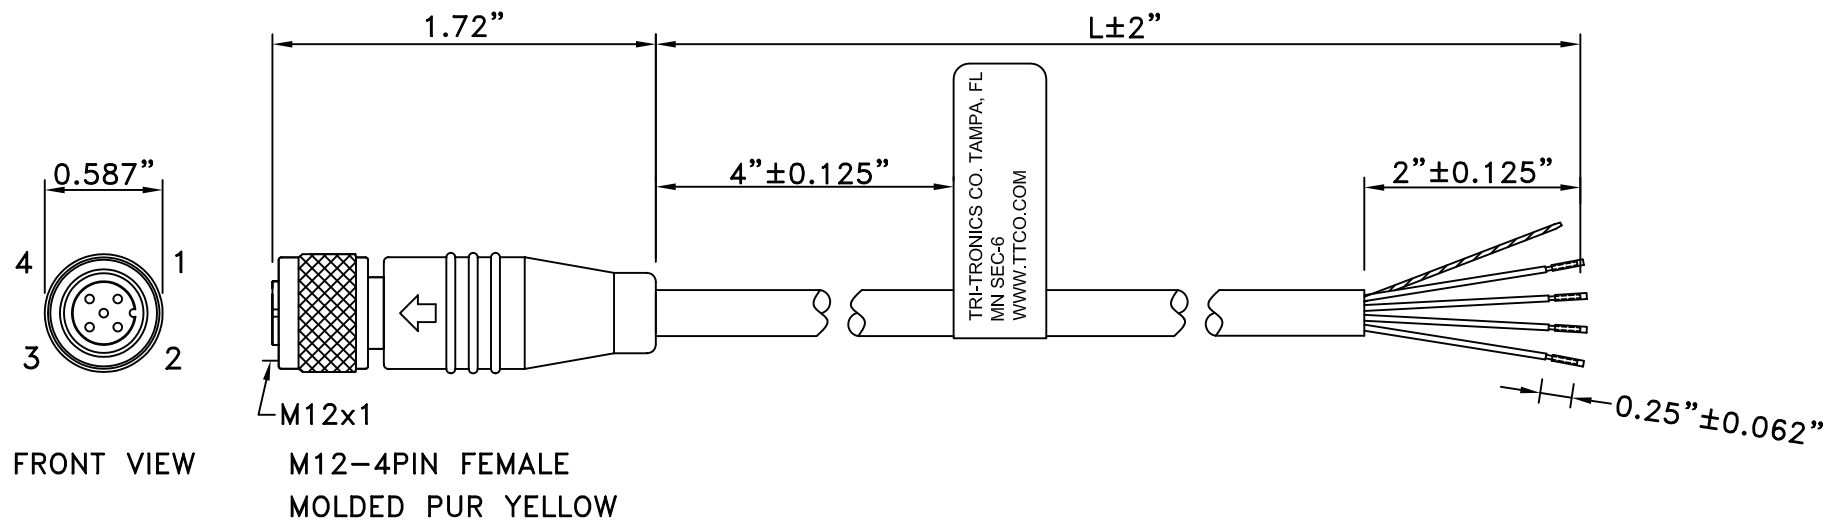

PIN OUT

M12-4PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC

COUPLING NUT	DRAIN WIRE	NC
--------------	------------	----

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12X1-040022YLLB-Fxxx-LF

SERIES

04 WAY

22 AWG

YL:YELLOW

FEMALE

LABEL

LEADFREE
6F: 6 FEET
15F: 15 FEET
25F: 25 FEET

DESCRIPTION:

***CONSTRUCTION:

- 1.CABLE: * UL2661 (4C/22#)+(ALUMINUM-MYLAR FOIL+22# DRAIN WIRE)
 * OD:7.3mm YELLOW PVC JACKET.
 * PRINTED ON JACKET WITH: TRI-TRONICS CO INC 4C 22AWG 30 AWM E101344
 * STYLE 2661 VW-1 105°C 300V SPACE SHUTTLE-C CSA LL80671 AWM II A/B
 * 80°C 300V FT1

***CONNECTORS:

- 2.M12-5PIN: * M12-4PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
 * GASKET: SILICONE RUBBER BLACK COLOR.
 * FERRULE: BRASS WITH NICKEL PLATED.
 * MOLDED: PUR YELLOW COLOR.
- 3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL MN SEC-6 WWW.TTCO.COM"
- 4.TEST: * CT: 2 Ohm. IS: 5M Ohm.
- 5.ELECTRICAL: * CURRENT RATING: 4A VOLTAGE RATING: 250V
- 6.MECHANICAL: * TEMPERATURE: -25°C TO 90°C PROTECTION: IP 68, NEMA 6P
- 7.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: * MATERIAL WITH RoHS GRADE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12X1-040022YLLB-Fxxx-LF

SERIES

04 WAY

22 AWG

YL:YELLOW

LEADFREE

6F: 6 FEET

15F: 15 FEET

25F: 25 FEET

FEMALE
LABEL

DESCRIPTION: