


# M12 4PIN FEMALE D-CODE PANEL MOUNT TO OPEN

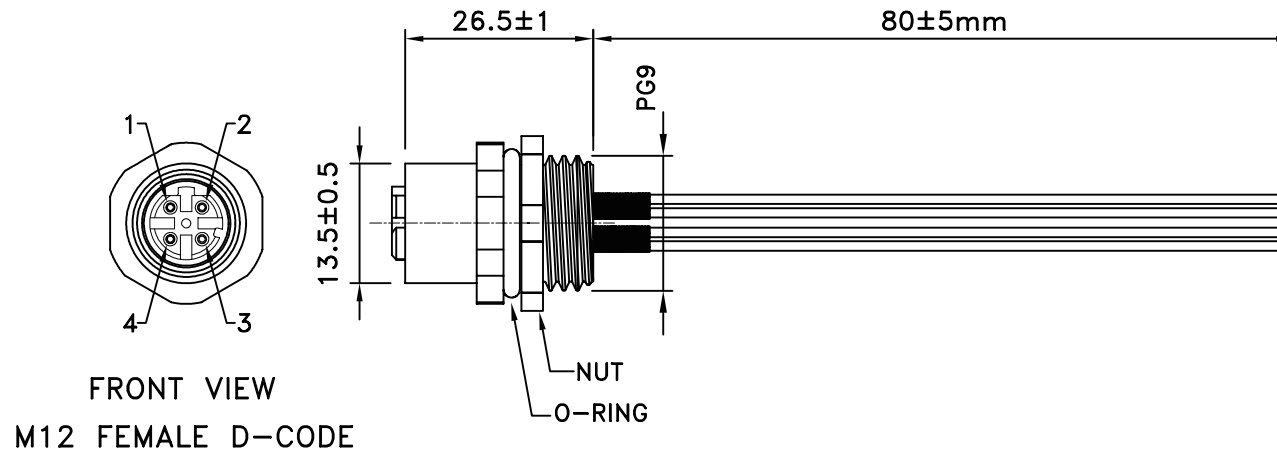

## \*\*\*CONSTRUCTION:

1.CABLE: \* UL 1061 24AWG OD:1.1mm.

## \*\*\*CONNECTORS:

2.M12-4F: \* M12 4PIN FEMALE D-CODE SOLDER TYPE FOR PANEL MOUNT.

- \* PINS: BRASS WITH GOLD PLATED.
- \* INSULATOR: PBT BLACK UL94V-0 RATED.
- \* SHELL: BRASS WITH NICKEL PLATED.
- \* GASKET: SILICONE RUBBER BLACK COLOR.
- \* NUT: PG-9,BRASS WITH NICKEL PLATED.

3.SHRINK TUBE: \*  $\phi$ 1.5\*15mm BLACK.

4.TEST : \* CT:2 Ohm IS:5M ohm.

5.PACKING: \* PACK EACH CABLE IN A POLY BAG.

6.MATERIAL: \* MATERIAL WITH RoHS GRADE.

## PIN OUT

M12-4P  
FEMALE

1	NC
2	NC
3	NC
4	NC

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

PPOJECTION

照片框

## ORDER INFORMATION

M12X1-04D0024W1-F8C-LF

SERIES

04 WAY D TYPE

24 AWG

WIRE

80mm

LEADFREE

FEMALE

DESCRIPTION: