



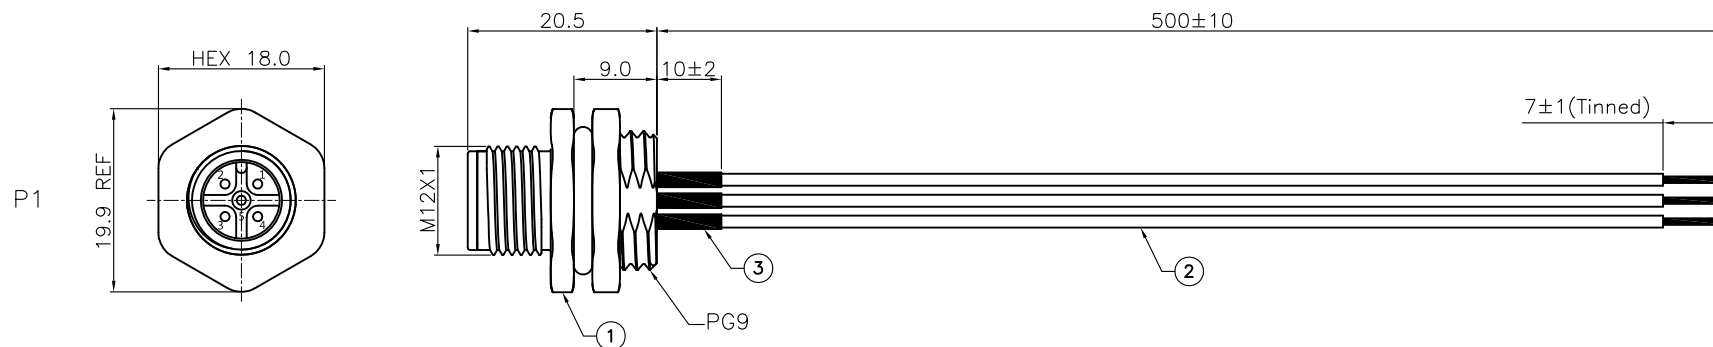


PIN OUT:

P1		
1	Brwon	Tin
2	White	Tin
3	Blue	Tin
4	Black	Tin
5	Grey	Tin



Recommended
Panel Cut-Out
Thickness:4.0Max.



Pin Assignments
Front View

ITEM	DESCRIPTION	Q'TY
1	M12 A Code Plug 5Pin Rear Fastened Solder Type	1
2	UL1569 22AWG Wire Color:XX	5
3	Heat Shrink Tube OD:2.0 L=10mm Color:Black	5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M12X1-050022W1PANO-M50C

SERIES

05 WAY

WIRE
22 AWG

500mm
MALE
NUT+O-RING
PANEL FRONT

DESCRIPTION: M12 A CODE 5PIN PLUG WIRE HARNESS