
M12-5PIN FEMALE TO OPEN (BLACK PVC JACKET)

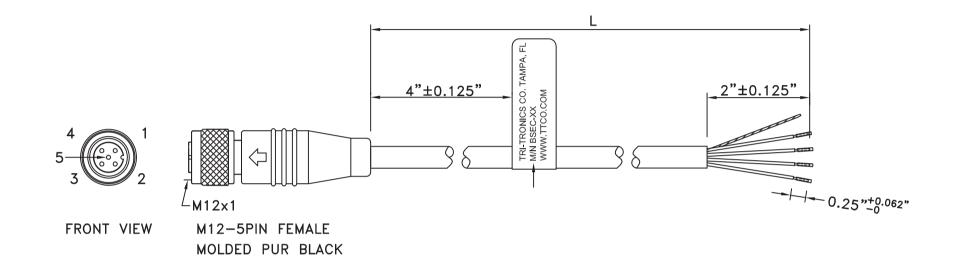

PIN OUT

M12-5PIN FEMALE

	1	BROWN	— NC	
	2	WHITE		
	_	DITIE		
	3 -	DIACK		
	4		NC	
COUPLING	NUT	DRAIN WIRE	- NC	

(L=6'±2") (L=15'±6") (L=25'±1')

E	OHS Compliant	TOLERANCES ARE		ORDER INFORMATION
PCB CONNECTORS Cable ASSEMBLIES 煜倫股份有限公司	DRAWING BY CY CHECKED BY GENIUS UNIT/mm SCALE 1:1	X. ± .X ± .XX ± .XX ± .XXX ± ANG ±	照片框	M12X1-050026BK-Fxxx-LF SERIES LEADFREE 06F:6 FEET 15F:15 FEET 25 WAY FEMALE BLACK
www.morethanall.com	SIZE A4 PPOJECTIC	N 		DESCRIPTION:

M12-5PIN FEMALE TO OPEN (BLACK PVC JACKET)

***CONSTRUCTION:

1.CABLE: * UL2464 (4C/26#)+(ALUMINUM-MYLAR FOIL+26# DRAIN WIRE)

OD:4.4mm BLACK PVC JACKET (HIGH FLEX STRANDING).

***CONNECTORS:

2.M12-5PIN: * M12-5PIN FEMALE SOLDER TYPE.

* PIN: BRASS WITH GOLD PLATED.

* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.

* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.

* O-RING: SILICONE RUBBER RED COLOR.

* FERRULE: BRASS WITH NICKEL PLATED.

* MOLDED: PUR BLACK COLOR.

3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N BSEC-XX WWW.TTCO.COM"

4.TEST: * CT: 2 Ohm. IS: 5M Ohm.

5.ELECTRICAL: * CURRENT RATING: 1.5A VOLTAGE RATING: 250V

6.MECHANICAL: * TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P

7.PACKING: * PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: * MATERIAL WITH ROHS GRADE.

9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION

(THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET): UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS, ETC.);

CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS, ETC.)

(2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR

(3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

