
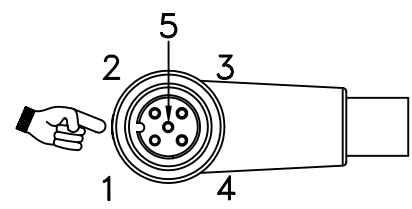


TITLE: M12-5PIN FEMALE TO OPEN (BLACK PVC JACKET)

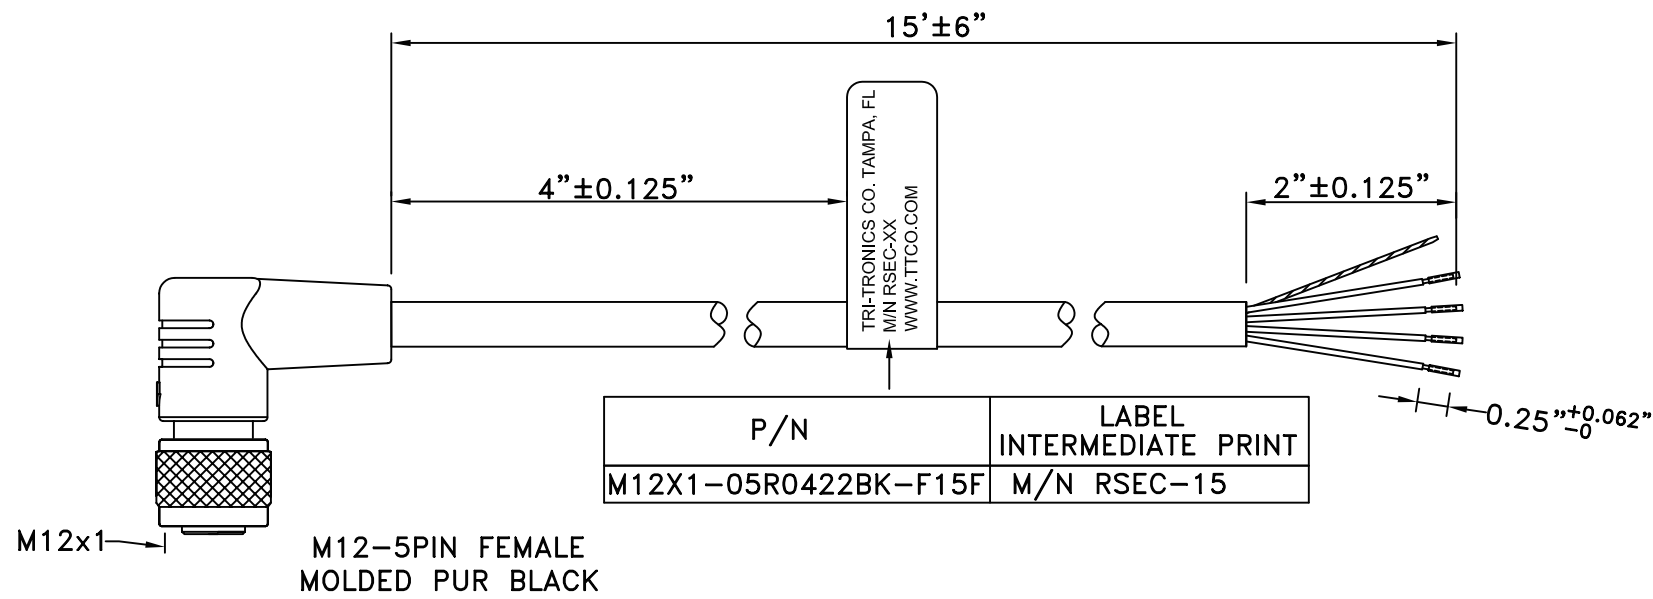

PIN OUT		
M12-5PIN FEMALE		
1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC
COUPLING NUT	DRAIN WIRE	NC
5	NC	

TITLE: M12-5PIN FEMALE TO OPEN (BLACK PVC J

***CONSTRUCTION:

- 1.CABLE: * UL2464 (4C/22#)+(ALUMINUM-MYLAR FOIL+22# DRAIN WIRE)
OD:5.2mm BLACK PVC JACKET.

***CONNECTORS:

- 2.M12-5PIN: * M12-5PIN FEMALE SOLDER TYPE.
* PIN: BRASS WITH GOLD PLATED.
* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
* O-RING: SILICONE RUBBER RED COLOR.
* FERRULE: BRASS WITH NICKEL PLATED.
* MOLDED: PUR BLACK COLOR.
- 3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N RSEC-XX WWW.TTCO.COM"
- 4.TEST: * CT: 2 Ohm. IS: 5M Ohm.
- 5.ELECTRICAL: * CURRENT RATING: 4A VOLTAGE RATING: 300V
- 6.MECHANICAL: * TEMPERATURE: 105°C PROTECTION: IP 68, NEMA 6P
- 7.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: * MATERIAL WITH RoHS GRADE.
- 9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION
(THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE
LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):
UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);
CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)
(2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
(3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP ARO

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SIZE A4

SCALE 1:1

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12X1-05R0422BK-F15F-LF
SERIES 5 PIN 90° 22AWG 04C BLACK FEMALE 15FT LEADFREE

DESCRIPTION: