
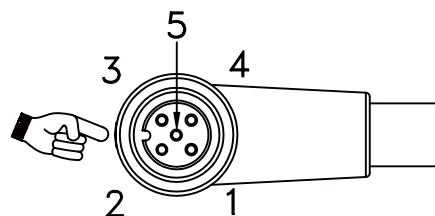


# M12-5PIN FEMALE RIGHT-ANGLE TO OPEN (COLOR:BLACK,GRAY,YELLOW PVC JACKET)

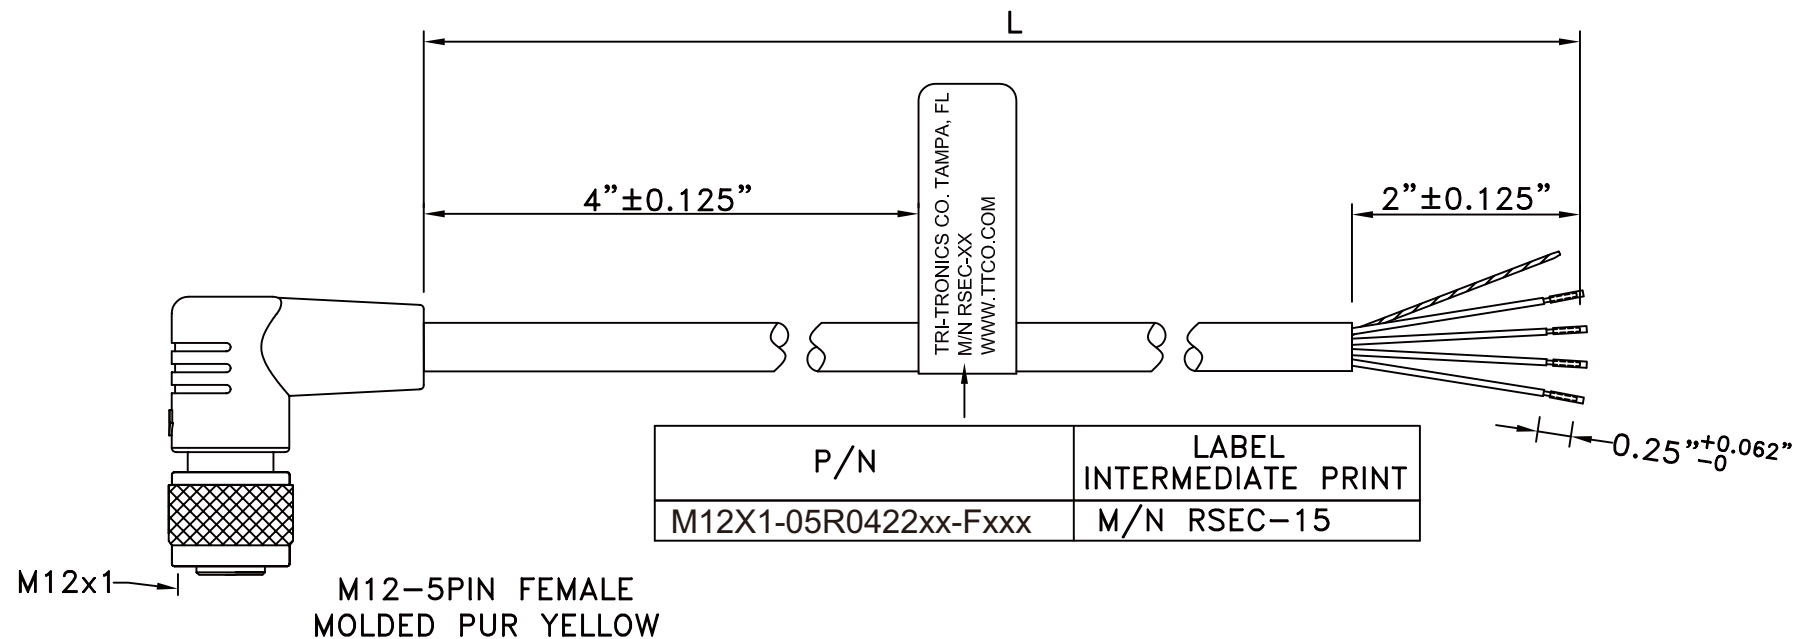

PIN OUT	
M12-5PIN FEMALE	
1	BROWN NC
2	WHITE NC
3	BLUE NC
4	BLACK NC
COUPLING NUT	DRAIN WIRE NC
5	NC

L=2M/5M/10M METER

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4


TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION



## ORDER INFORMATION

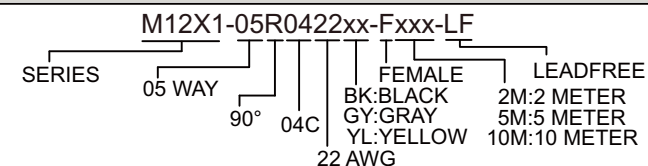

DESCRIPTION:

\*\*\*CONSTRUCTION:

1.CABLE: \* UL2464 (4C/22#)+TISSUE PAPER OD:5.2mm (COLOR:BLACK,GRAY,YELLOW PVC JACKET)

\*\*\*CONNECTORS:

2.M12-5PIN: \* M12-5PIN FEMALE SOLDER TYPE.  
\* PIN: BRASS WITH GOLD PLATED.  
\* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.  
\* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.  
\* O-RING: SILICONE RUBBER RED COLOR.  
\* MOLDED: PUR COLOR.

3.LABEL: \* PRINT: "TRI-TRONICS CO. TAMPA, FL M/N RSEC-XXMU WWW.TTCO.COM"

4.TEST: \* CT: 2 Ohm. IS: 5M Ohm.

5.ELECTRICAL: \* CURRENT RATING: 4A VOLTAGE RATING: 250V

6.MECHANICAL: \* TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P

7.PACKING: \* PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: \* MATERIAL WITH RoHS GRADE.

9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION  
(THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE  
LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):  
UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);  
CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)  
(2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR  
(3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

M12X1-05R0422xx-Fxxx-LF  
SERIES 05 WAY 90° 04C 22 AWG  
FEMALE BK:BLACK GY:GRAY YL:YELLOW  
LEADFREE 2M:2 METER 5M:5 METER 10M:10 METER

DESCRIPTION: