


## TITLE: M12-5PIN FEMALE TO OPEN (GRAY PVC JACKET)



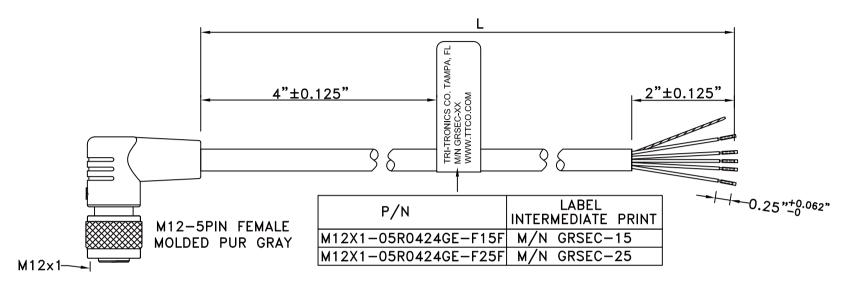

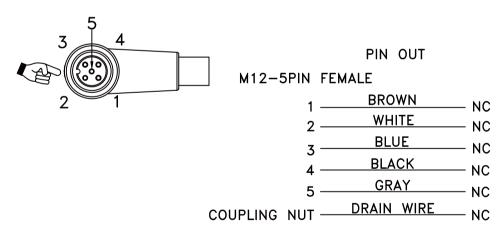

RoHS Compliant TOLERANCES ARE			ORDER INFORMATION M12X1-05R0424GE-FxxF-LF	
## CORETHANALI PCB CONNECTORS Cable ASSEMBLIES  提倫股份有限公司	DRAWING BY CY CHECKED BY GENIUS UNIT/mm   SCALE 1:1 DATE	X.± ,X± ,XX ± ,XXX ± ANG ±	照片框	SERIES   LEADFREE   15F:15 FEET   25F:25 FEET   FEMALE   YELLOW   24 AWG
www.morethanall.com	SIZE A4 PPOJECT	ION 😝 🚭		DESCRIPTION:

## TITLE: M12-5PIN FEMALE TO OPEN (GRAY PVC JACKET)

## \*\*\*CONSTRUCTION:

1.CABLE: \* UL2464 (5C/24#)+(ALUMINUM-MYLAR FOIL+24# DRAIN WIRE)

OD:5.2±0.19mm GRAY PVC JACKET.

## \*\*\*CONNECTORS:

2.M12-5PIN: \* M12-5PIN FEMALE SOLDER TYPE.

\* PIN: BRASS WITH GOLD PLATED.

\* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.

\* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.

\* O-RING: SILICONE RUBBER RED COLOR.

\* FERRULE: BRASS WITH NICKEL PLATED.

\* MOLDED: PUR GRAY COLOR.

3.LABEL: \* PRINT: "TRI-TRONICS CO. TAMPA, FL M/N GRSEC-XX WWW.TTCO.COM"

4.TEST: \* CT: 2 Ohm. IS: 5M Ohm.

5.ELECTRICAL: \* CURRENT RATING: 2A VOLTAGE RATING: 250V

6.MECHANICAL: \* TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P

7.PACKING: \* PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: \* MATERIAL WITH ROHS GRADE.

9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION

(THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE

LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):

UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS, ETC.);

CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS, ETC.)

- (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
- (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

