
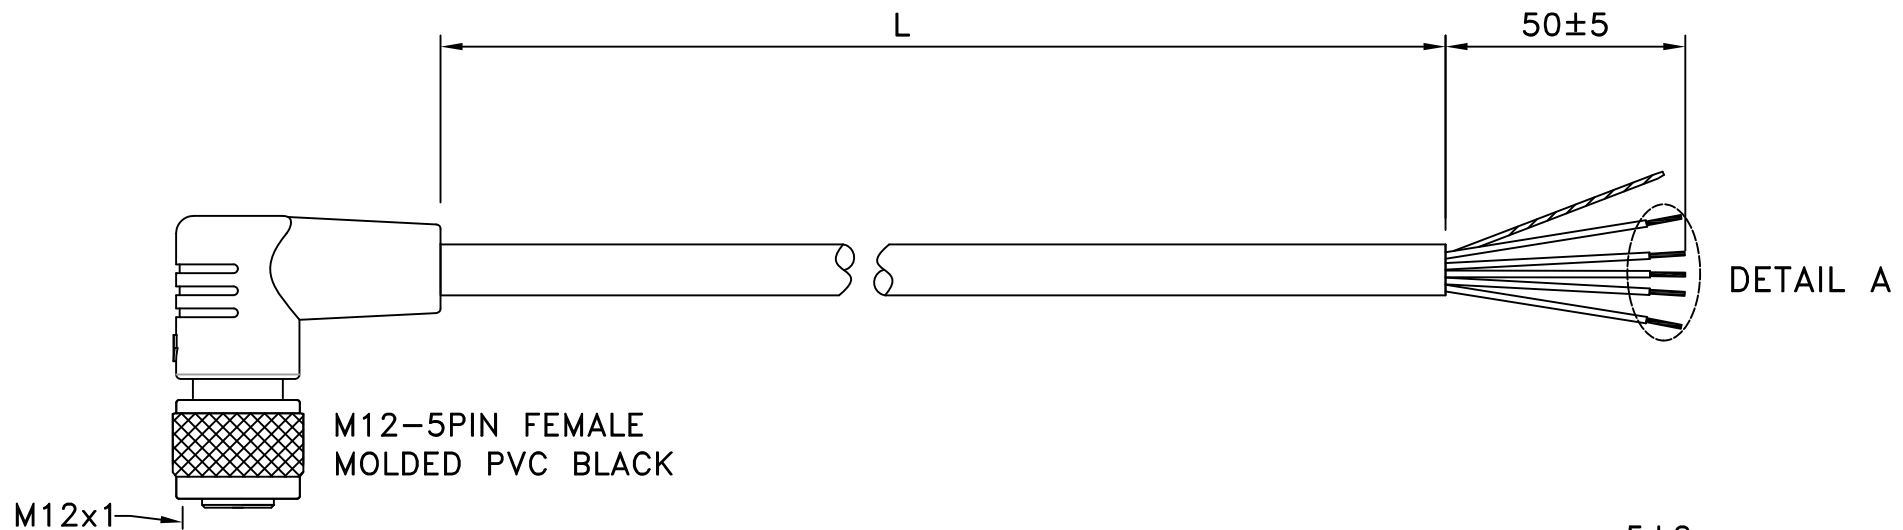


PIN OUT M12-5PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC
5	GRAY	NC
NC	DRAIN WIRE	NC



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M12X1-05R4522BK-Fxx-LF

SERIES

5 PIN 90°

45 DEG

22AWG

BLACK

FEMALE

LEADFREE

2M:2000mm

5M:5000mm

10M:10000mm

DESCRIPTION: M12-5PIN FEMALE TO OPEN (BLACK PVC JACKET)

***CONSTRUCTION:

1.CABLE: * UL2464 (5C/22#)+EA OD:5.2mm BLACK PVC JACKET(−40°C~+80°C).

***CONNECTORS:

- 2.M12−5PIN: * M12−5PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V−0 RATED.
 * COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
 * O−RING: SILICONE RUBBER RED COLOR.
 * FERRULE: BRASS WITH NICKEL PLATED.
 * MOLDED: BLACK PVC 45P.
- 3.TEST: * CT: 2 Ohm. IS: 20M Ohm. DC300V/0.1S
- 4.ELECTRICAL: * CURRENT RATING: 4A VOLTAGE RATING: 250V
- 5.WATERPROOF: * IP 68, NEMA 5P
- 6.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 7.MATERIAL: * MATERIAL WITH RoHS GRADE.

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M12X1-05R4522BK-Fxx-LF

SERIES

5 PIN 90°

45 DEG

22AWG

BLACK

LEADFREE

2M:2000mm

5M:5000mm

10M:10000mm

FEMALE

DESCRIPTION: M12−5PIN FEMALE TO OPEN (BLACK PVC JACKET)