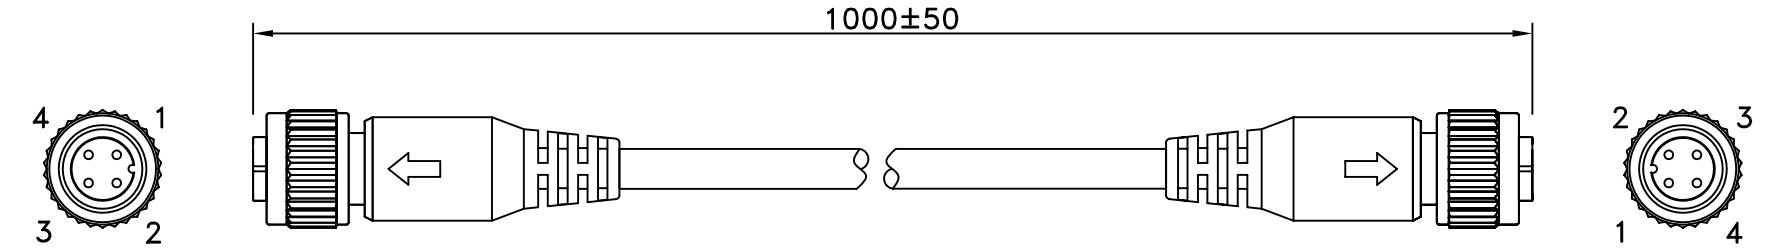

FRONT VIEW

M12-4PIN FEMALE
MOLDED BLACK

M12-4PIN FEMALE
MOLDED BLACK

FRONT VIEW

***CONSTRUCTION:

1.CABLE: * NO UL (4C/22#) OD:5.2mm BLACK PVC JACKET.

***CONNECTORS:

2.M12-4PIN: * M12-4PIN FEMALE SOLDER TYPE.
* PIN: BRASS WITH GOLD PLATED.
* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
* SHELL: BRASS WITH NICKEL PLATED.
* O-RING: SILICONE RUBBER RED COLOR.
* MOLDED: PVC 30P BLACK.

3.TEST: * CT: 2 Ohm. IS: 5M Ohm.
* RATE CURRENT: 4A RATE VOLTAGE: MAX.250V

4.PACKING: * PACK EACH CABLE IN A POLY BAG.

5.MATERIAL: * MATERIAL WITH RoHS GRADE.

PIN OUT

M12-4F		M12-4F
1	BROWN	1
2	WHITE	2
3	BLUE	3
4	BLACK	4

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12X2-040422-F1M-LF
- SERIES
- 04 TO 04 PIN
- 22AWG
- MALE TO FEMALE
- 1 METER
- LEADFREE

DESCRIPTION: M12-4PIN FEMALE TO FEMALE