


# M12-5PIN FEMALE TO M12-4PIN MALE

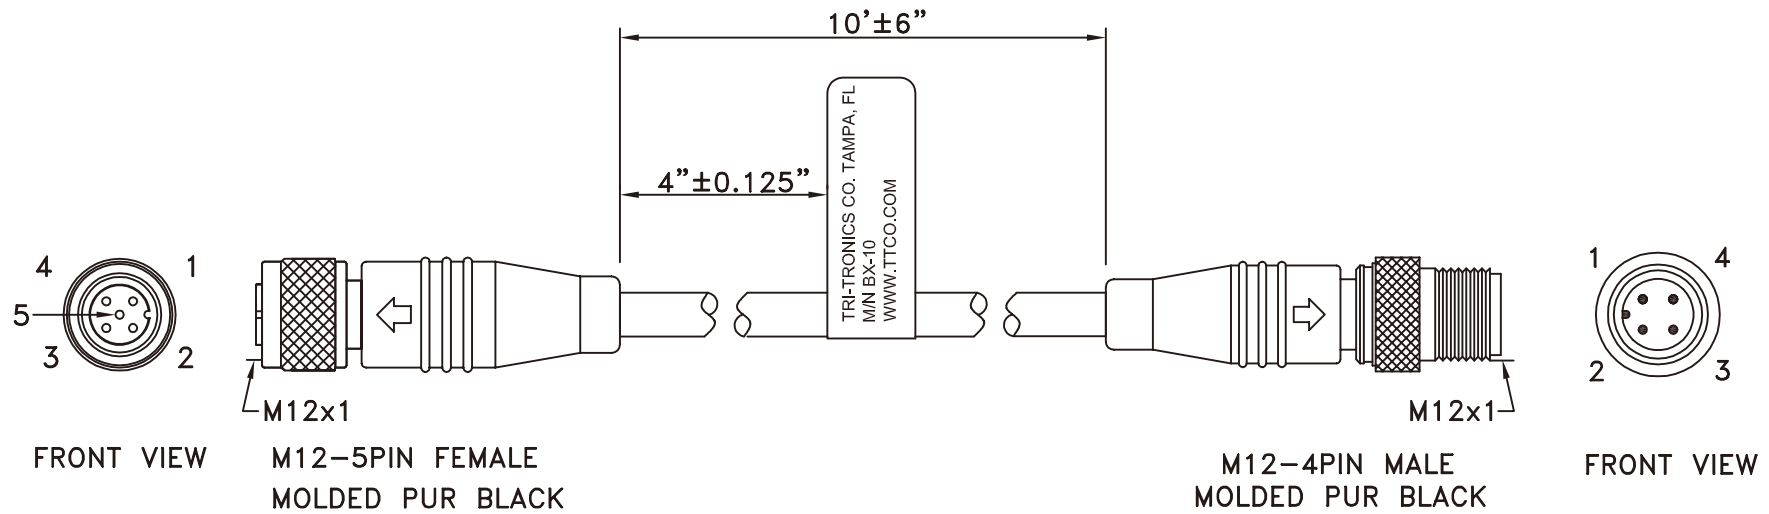

PIN OUT

M12-5PIN FEMALE		M12-4PIN MALE
1	BROWN	1
2	WHITE	2
3	BLUE	3
4	BLACK	4
	DRAIN WIRE	
5	NC	

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

M12X2-040526BK-E10F-LF

SERIES

LEADFREE  
10 FT  
MALE TO FEMALE  
BLACK  
26AWG  
04 TO 05 PIN

DESCRIPTION:

## M12-5PIN FEMALE TO M12-4PIN MALE

### \*\*\*CONSTRUCTION:

- 1.CABLE: \* UL2464 (4C/26#)+(ALUMINUM-MYLAR FOIL+26# DRAIN WIRE)  
OD:4.4mm BLACK PVC JACKET (HIGH FLEX STRANDING).

### \*\*\*CONNECTORS:

- 2.M12-5PIN: \* M12-5PIN FEMALE SOLDER TYPE.  
\* PIN: BRASS WITH GOLD PLATED.  
\* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.  
\* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.  
\* O-RING: SILICONE RUBBER RED COLOR.  
\* FERRULE: BRASS WITH NICKEL PLATED.  
\* MOLDED: PUR BLACK COLOR.
- 3.M12-4PIN: \* M12-4PIN MALE SOLDER TYPE.  
\* PIN: BRASS WITH GOLD PLATED.  
\* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.  
\* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.  
\* FERRULE: BRASS WITH NICKEL PLATED.  
\* MOLDED: PUR BLACK COLOR.
- 4.LABEL: \* PRINT: "TRI-TRONICS CO. TAMPA, FL M/N BX-10 WWW.TTCO.COM"  
5.TEST: \* CT: 2 Ohm. IS: 5M Ohm.  
6.ELECTRICAL: \* CURRENT RATING: 1.5A VOLTAGE RATING: 250V  
7.MECHANICAL: \* TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P  
8.PACKING: \* PACK EACH CABLE IN A POLY BAG.  
9.MATERIAL: \* MATERIAL WITH RoHS GRADE.

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
**煜倫股份有限公司**

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

www.morethanall.com

SIZE A4

PPOJECTION 

照片框

**ORDER INFORMATION**

M12X2-040526BK-E10F-LF

SERIES

LEADFREE

10 FT

MALE TO FEMALE

BLACK

26AWG

04 TO 05 PIN

DESCRIPTION:

- 10.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION  
 (THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE  
 LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):  
 UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);  
 CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)  
 (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR  
 (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

M12X2-040526BK-E10F-LF  
 SERIES | 26AWG | BLACK | 04 TO 05 PIN | 10 FT | LEADFREE | MALE TO FEMALE

DESCRIPTION: