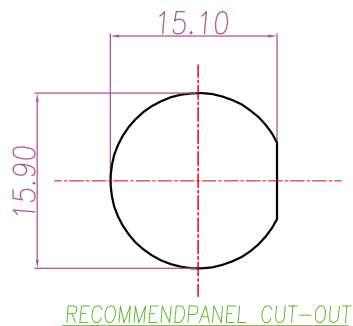
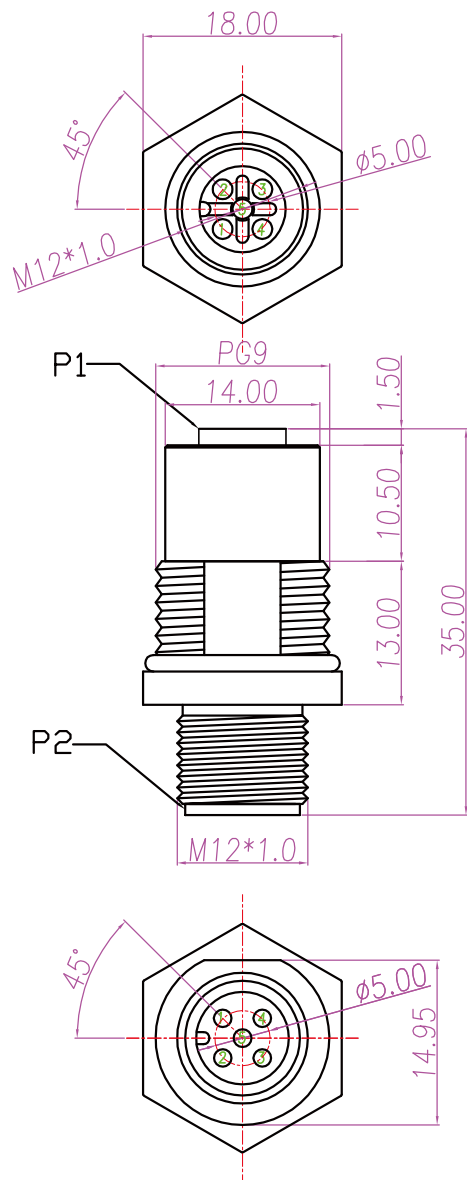


1. MATERIAL :
 - 1-1. HOUSING-A : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. HOUSING-B : PBT UL94V-0 ; COLOR : BLACK
 - 1-3. O-RING-A : EPDM ; COLOR : BLACK
 - 1-4. O-RING-B : EPDM ; COLOR : BLACK
 - 1-5. NUT : BRASS
 - 1-6. SHELL : BRASS
 - 1-7. CONTACT : BRASS
2. FINISH :
 - 2-1. CONTACT : GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED
 - 2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof: IPX7
4. Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M12X2-ASP-0505-LF

SERIES

LEADFREE

05 TO 05 WAY

PANEL

FEMALE TO MALE

DESCRIPTION: M12 5pin 公對母 轉接頭