
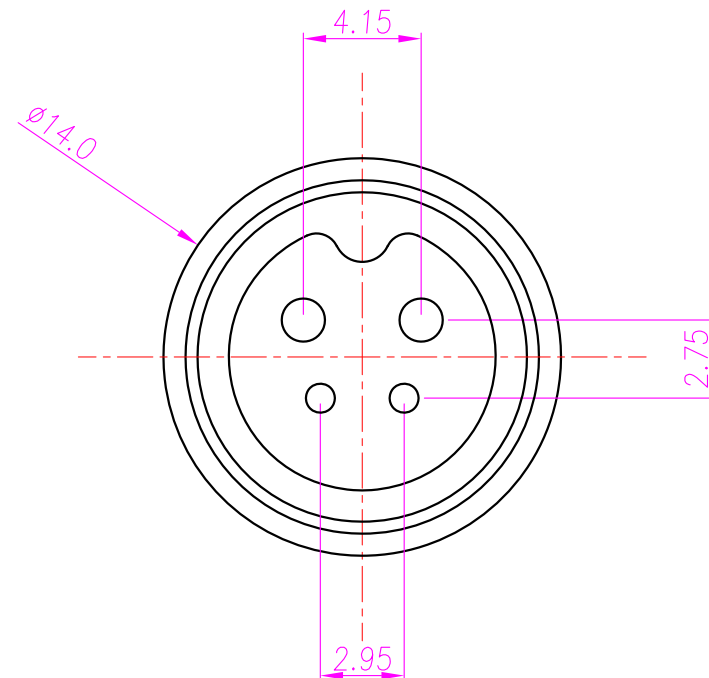


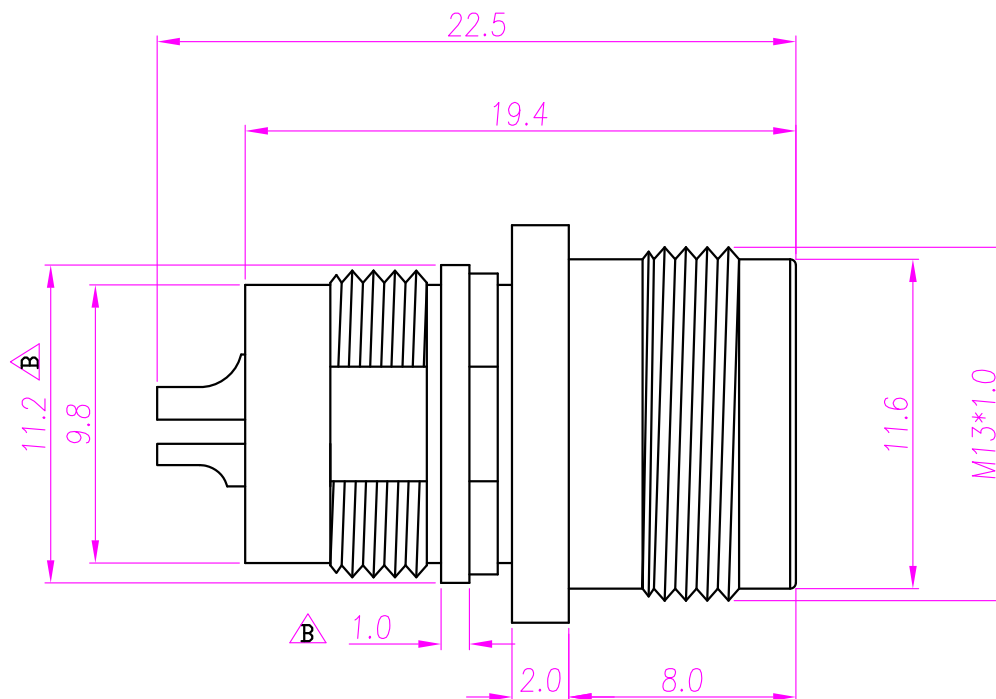

1. MATERIAL :
 - 1-1. HOUSING : PBT ; COLOR : WHITE Δ B
 - 1-2. CONTACT : BRASS.
2. FINISH :
 - 2-1. CONTACT : SEE TABLE A
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 10A & 3A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof: IP67
4. Environmental :
 - 4-1. Operation Temperature : $-20^{\circ}\text{C} \sim 85^{\circ}\text{C}$

TABLE A/表A

M13-PSPA-04	NICKEL PLATED
PART NO.	PLATED(CONTACT)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

M13-PSPA-04-LF
SERIES | | LEADFREE
| | 04WAY
| | PANEL FRONT
| | SOLDER
| | MALE

DESCRIPTION: 防水頭M13 4pin (M) 2+2 線端焊線式