

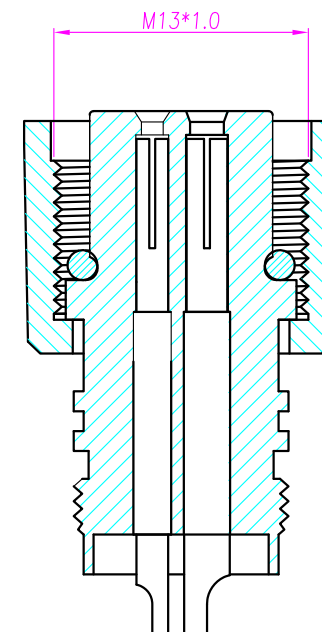
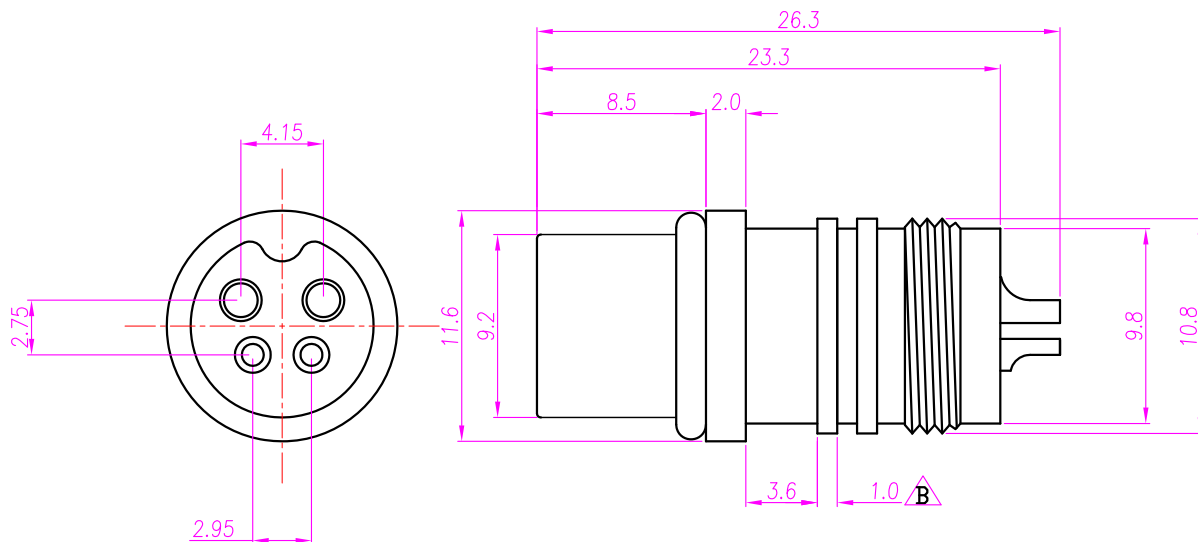


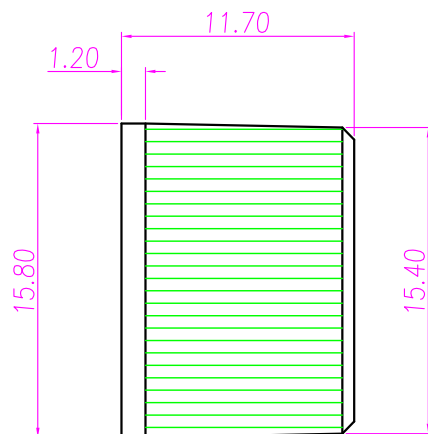

1. MATERIAL :
  - 1-1. HOUSING : PBT ; COLOR : WHITE  $\triangle B$
  - 1-2. CONTACT : BRASS.
  - 1-3. NUT : SEE TABLE A.
  - 1-4. O-RING : SILCON ; COLOR : BLACK.
2. FINISH :
  - 2-1. CONTACT : SEE TABLE A
  - 2-2. NUT : SEE TABLE A
3. ELECTRICAL SPECIFICATION :
  - 3-1. Rated current : 10A & 3A
  - 3-2. Rated Voltage : 125V
  - 3-3. Water proof: IPX7
4. Environmental :
  - 4-1. Operation Temperature :  $-20^{\circ}\text{C} \sim 85^{\circ}\text{C}$

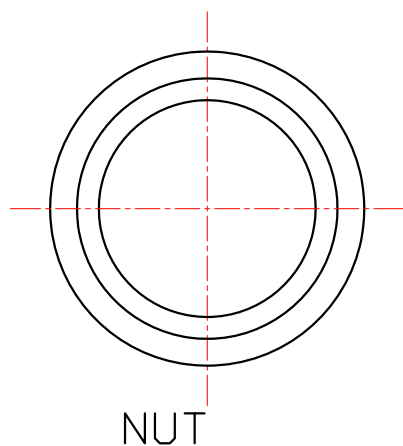

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
.X  $\pm$  0.20  
.XX  $\pm$  0.10  
.XXX  $\pm$  0.05  
ANG  $\pm$

PPOJECTION  $\rightarrow$

ORDER INFORMATION

M13-SS-04-LF  
SERIES T LEADFREE  
04 WAY  
SOLDER  
FEMALE

DESCRIPTION: 防水頭M13 4pin (F) 2+2 線端焊線式