
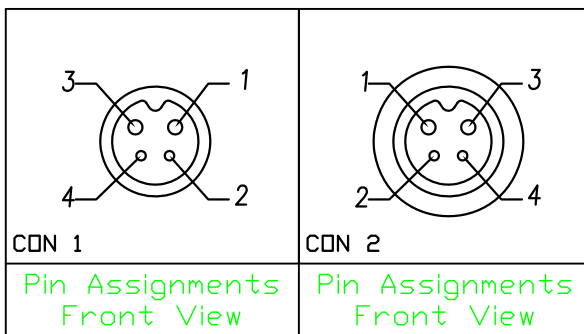


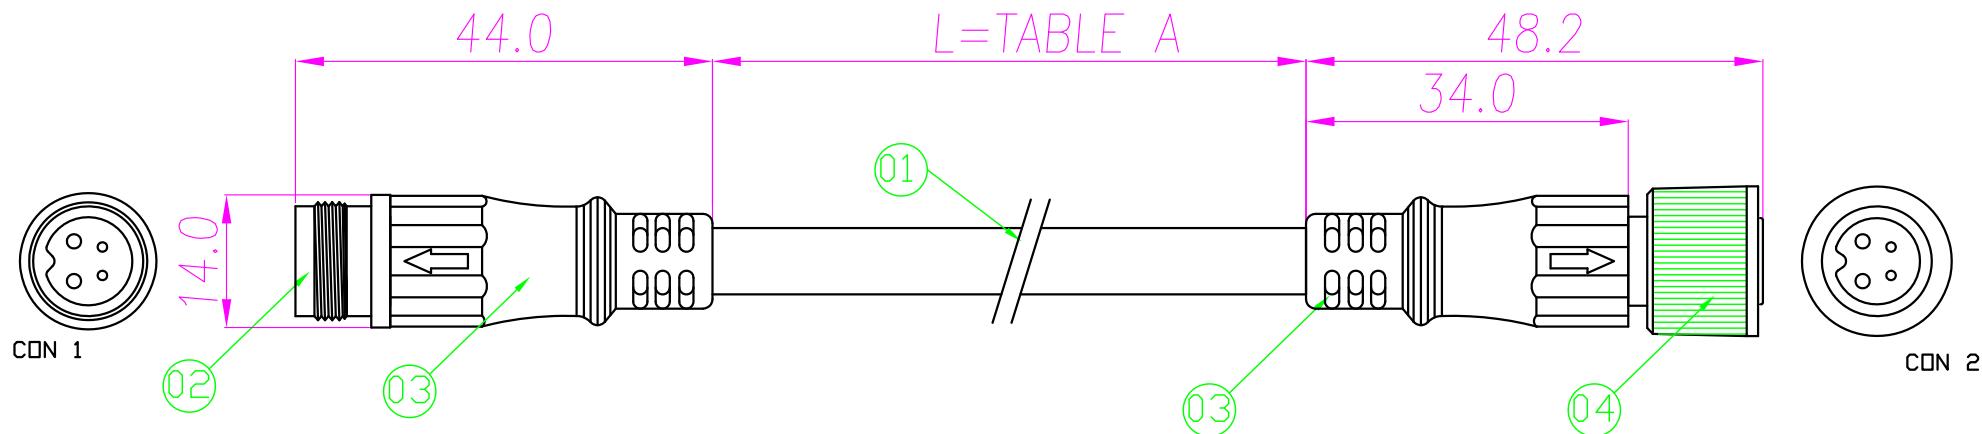

ITEM	DESCRIPTION	Q'TY
4	4PIN FEMALE	1
3	SR : PVC ; COLOR : WHITE.	1
2	4PIN MALE	1
1	PVC WHITE 16Awg*2C ; 20Awg*2C ; OD=7.2(TIN PLATED WIRE) Operation Temperature : -20℃~85℃ Water proof: IP67	1

- CON 1
1. MATERIAL :
- 1-1. HOUSING : PA66 ; COLOR : WHITE
- 1-2. CONTACT : BRASS.
2. FINISH :
- 2-1. CONTACT : GOLD PLATED.
- CON 2
1. MATERIAL :
- 1-1. HOUSING : PA66 ; COLOR : WHITE.
- 1-2. CONTACT : BRASS.
- 1-3. NUT : PA66 ; COLOR : WHITE.
- 1-4. O-RING : SILCON ; COLOR : BLACK.
2. FINISH :
- 2-1. CONTACT : GOLD PLATED.

TABLE A
10M
5M
3M
L

1	RED	1
2	YELLOW	2
3	BLACK	3
4	BROWN	4

CON 1 PIN ASSIGNMENTS CON 2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

M13X2-04041620-Axxx-LF

SERIES

LEADFREE

3M:3M

5M:5M

10M:10M

FEMALE TO MALE

04 TO 04 WAY

16/20 AWG

DESCRIPTION: M13 4pin (M) + (F) BAR CABLE