




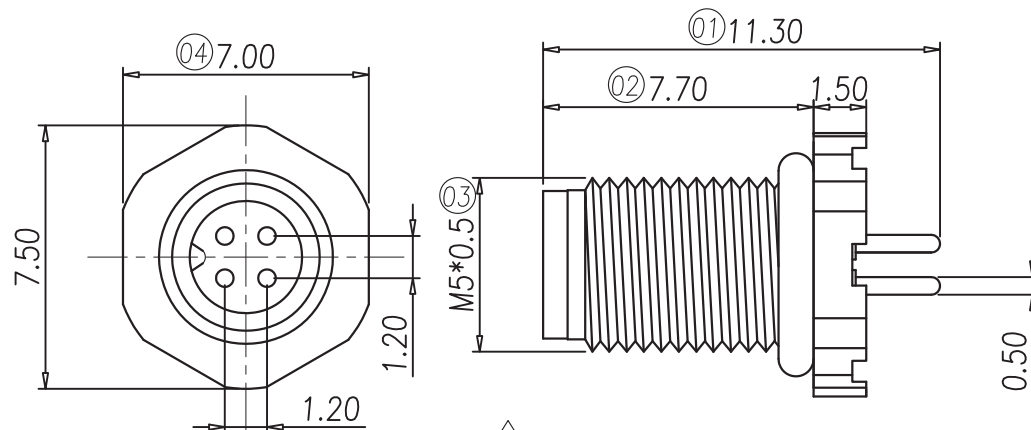



TABLE A

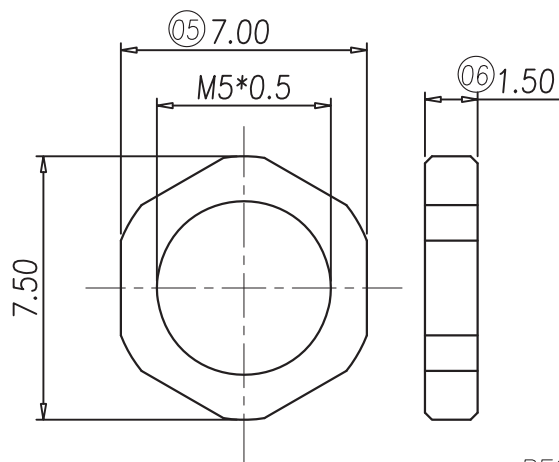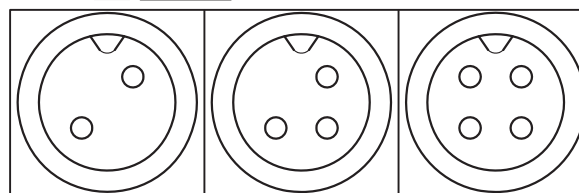


NUT

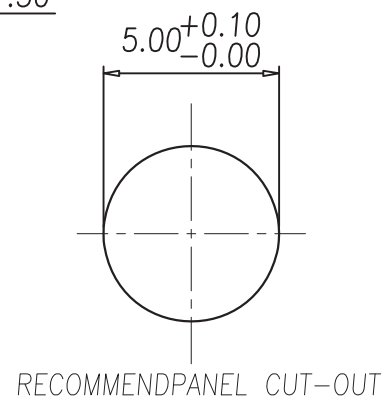

RECOMMEND PANEL CUT-OUT



RECOMMEND PANEL PCB

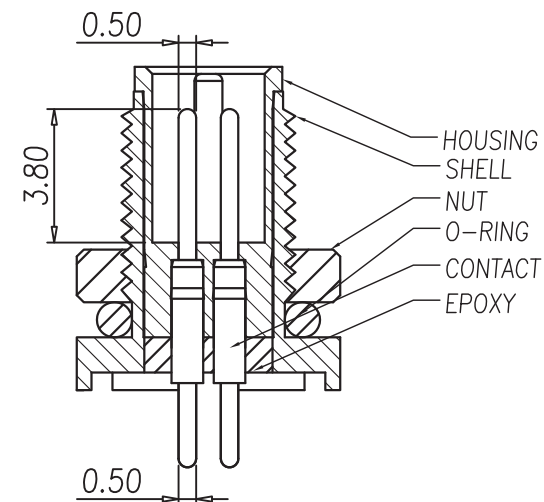

1. MATERIAL :

- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. NUT : BRASS
- 1-4. SHELL : BRASS
- 1-5. O-RING : NBR ; COLOR : BLACK
- 1-6. EPOXY BASE : EF400A & EF400B. COLOR : BLACK

2. FINISH :

- 2-1. CONTACT : GOLD FLISH MICRO INCHES MIN.
- 2-2. NUT : NICKEL PLATED.
- 2-3. SHELL : NICKEL PLATED.

3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 1A
- 3-2. Rated Voltage : 60V
- 3-3. Water proof: IP67

4. Environmental :

- 4-1. Operation Temperature : -20 ℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M5-PDPBNO-xx-LF
SERIES | | | | LEADFREE
| | | | 02-04 WAY
| | | | RING
MALE | | | | NUT
| | | | PANEL BACK
DIP 180°

DESCRIPTION: M5*0.5 (M)板端