


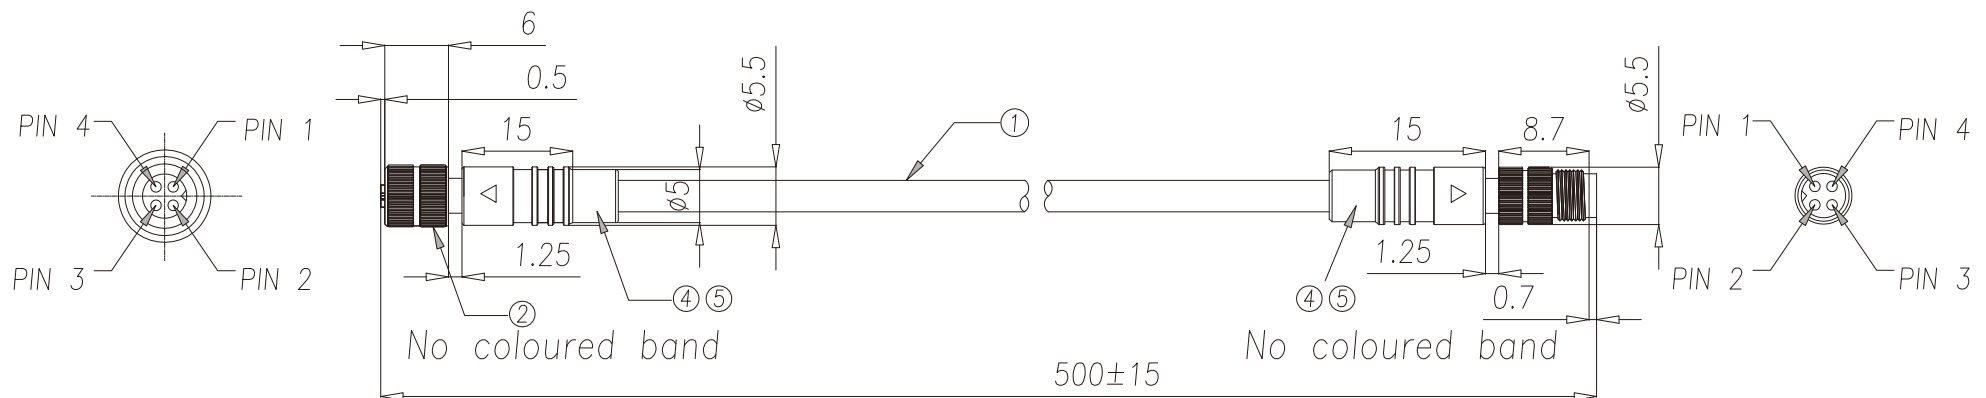

PIN ASSIGNMENT:

COLOUR	NAME	CONNECTION
RED		
GREEN		
BLUE		
SCREEN		

note:

2.Arrow marking:0.15–2.0mm high.

4.Sleeve alternate solder joints to contacts at connector 2. 3.

Packing:

Coiled hanking

5	Heat Shrink	8	PCS
4	50P PVC Black Molding	10	g
3	M5 4P male PIN M5-PS-04 (Non-Shiny dark black plating)	1	PCS
2	M5 4P Female PIN M5-SS-04 (Non-Shiny dark black plating)	1	PCS
1	Cable:(7/0.11TC*3C+96/0.10TC Braid)OD:3.0mm Colour:black L=0.5m	1	PCS
NO	Descripton	Q'TY	Unit

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°



ORDER INFORMATION

M5X2-040420-E50C-LF

SERIES

LEADFREE

500mm

MALE TO FEMALE

20AWG

4 PIN TO 4 PIN

DESCRIPTION: M5 4P(F) M5 4P(M) CABLE L=0.5M