
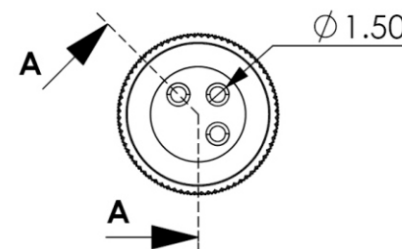
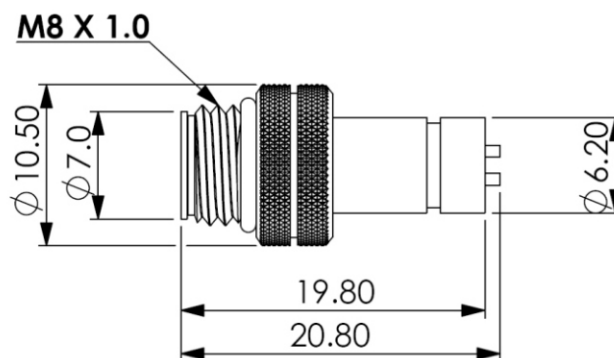


SECTION A-A



No.	Description	Material	Treat	Q'ty
1	Housing	Thermoplastic	UL94V-0	1
2	Shield Cover	Brass	Nickel Ptd.	1
3	Screw Cap	Brass	Nickel Ptd.	1
4	Sealed Ring	NBR		1
5	Terminals	Brass	Gold Ptd.	3

Specification:

Current : 2A

Operation Temperature: -20°C to 105°C

Insulation Resistance : 1000MΩ min.

Dielectric Strength : 500V AC min.

Waterproof Test :

Reference to IEC 60529 Edition

2.1 : 2001-02-IP67

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M8-PS20-03-LF
SERIES | T | LEADFREE
03 WAY
LONG 20.80mm
SOLDER
MALE

DESCRIPTION: 3P M8 WATER TIGHT
CABLE PLUG FOR MOLDING