
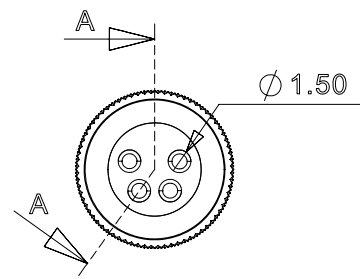
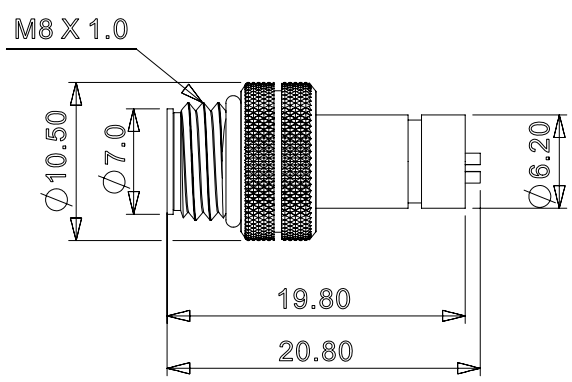


SECTION A-A

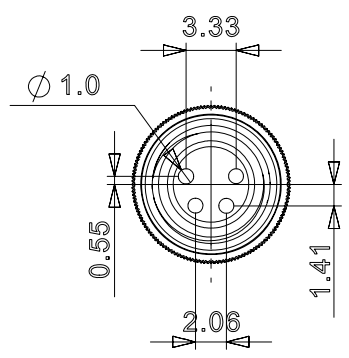

Specification:
 Current:2A
 Operation Temperature:-20 C to 105 C
 Insulation Resistance:1000M OHM min.
 Dielectric Strength:500V AC min.

No.	Description	Material	Treat	Q'TY
1	Housing	Thermoplastic	UL94V-0	1
2	Shield Cover	Brass	Nickel Ptd.	1
3	Screw cap	Brass	Nickel Ptd.	1
4	Sealed Ring	NBR		1
5	Terminals	Brass	Gold ptd.	4

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M8-PS20-04-LF
 SERIES LEADFREE
 04 WAY
 LONG 20.80mm
 SOLDER
 MALE

DESCRIPTION: 3P M8 WATER TIGHT
 CABLE PLUG FOR MOLDING