


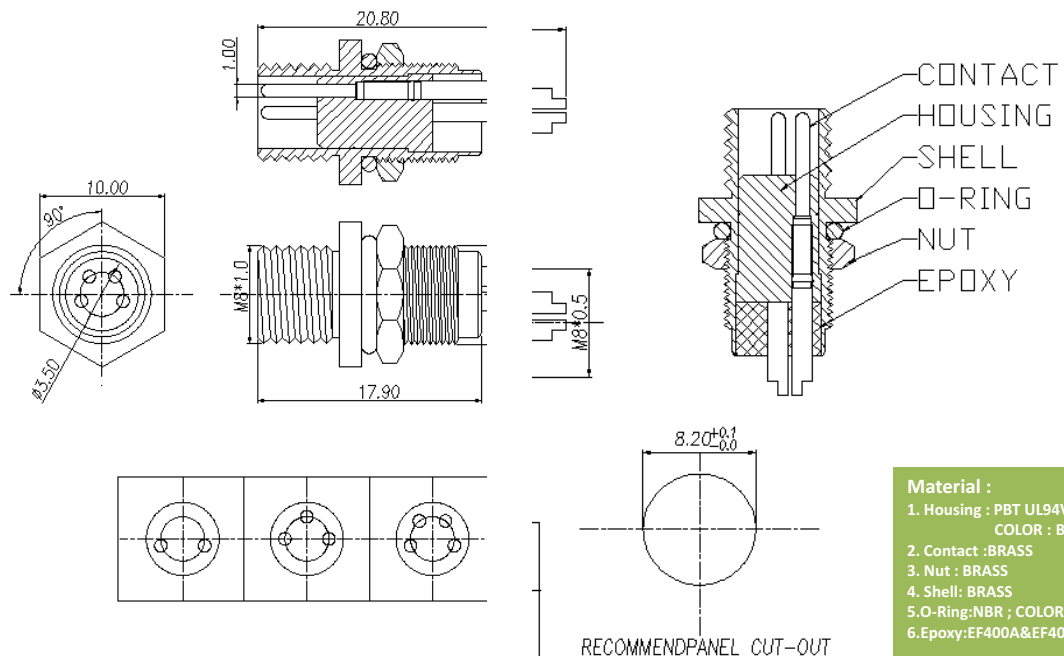


Material :
 1. Housing : PBT UL94V-0 ;
 COLOR : BLACK
 2. Contact : BRASS
 3. Nut : BRASS
 4. Shell: BRASS
 5. O-Ring: NBR ; COLOR : BLACK
 6. Epoxy: EF400A&EF400B

Finish :
 1. Contact : GOLD FLASH.
 2. Nut : NICKEL PLATED.
 3. Shell: NICKEL PLATED.

Specification :
 1. Rated current : 5A
 2. Rated Voltage : 125V
 3. Water proof: IP67

Environmental :
 1. Operation Temperature :
 -20 °C~85°C

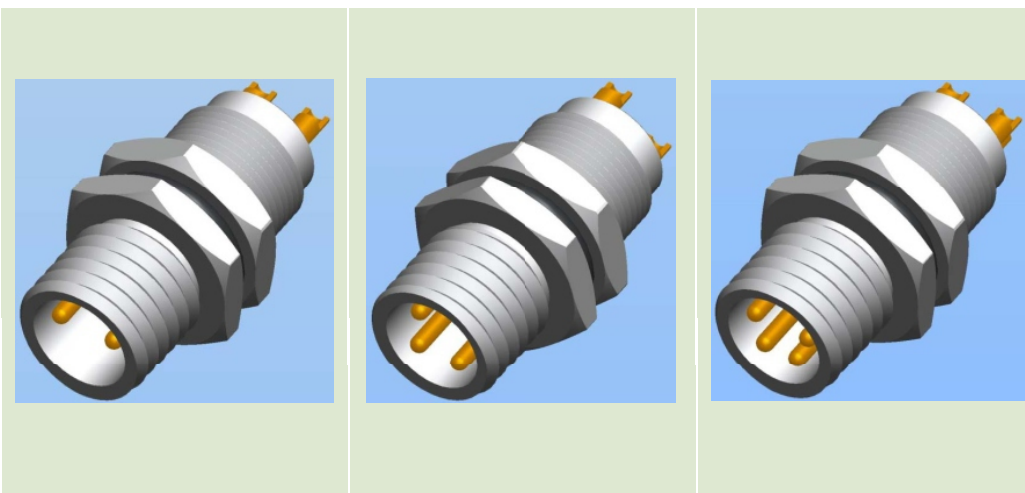

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M8-PSPANO-xx-LF
 SERIES LEADFREE
 MALE NUT RING
 PANEL FRONT
 SOLDER

DESCRIPTION: