
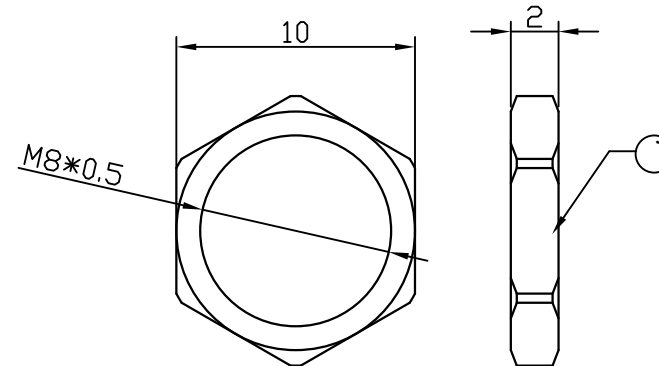
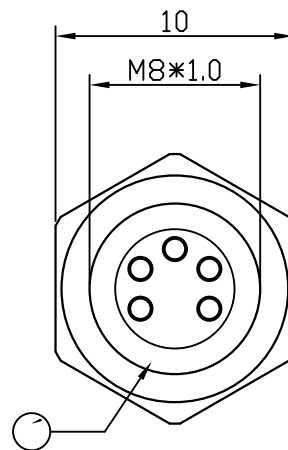
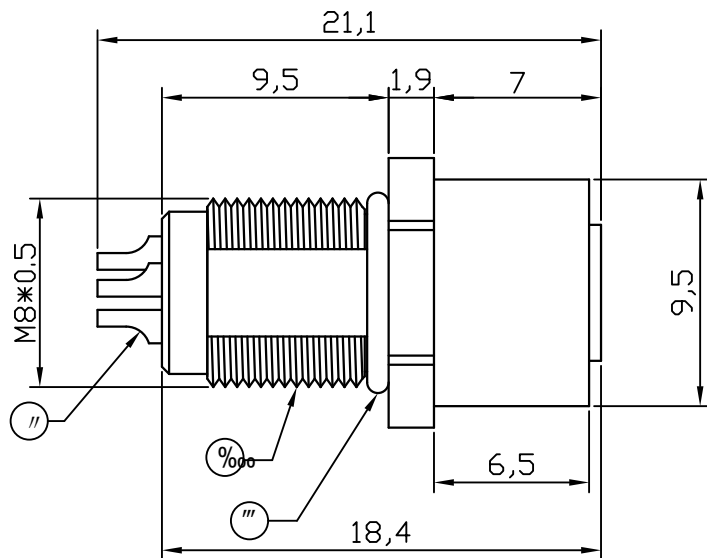


RECOMMENDED
PANEL CUT-OUT

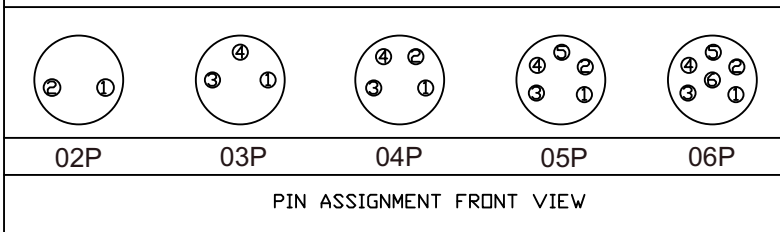

NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING:1A/5A
TEMPERATURE RANGE:-20°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
2~4 PIN:125V AC FOR ONE MINUTE
5~6 PIN:60V AC FOR ONE MINUTE

5	HEX NUT	BRASS, NICKEL PLATED, RoSH.		1
4	O-RING	silicon, RoSH.	BLACK	1
3	PIN CONTACT	BRASS, GOLD FLASH.		N
2	Plastic Insert	M8 NP connector, RoHS.	BLACK	1
1	SOCKET	BRASS, NICKEL PLATED, RoHS.		1
No.	PART NAME	DESCRIPTION	COLOR	Q' TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M8-SSPANO-xx-LF
SERIES | | | | LEADFREE
FEMALE | | | | RING
NUT
PANEL FRONT
SOLDER

DESCRIPTION: