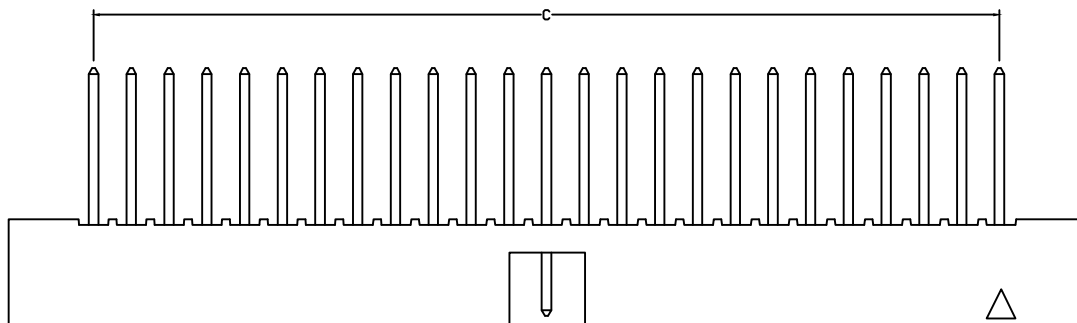


	AR寸	BR寸	CR寸
6P	13.06	12.06	4.00
8P	15.06	14.06	6.00
10P	17.06	16.06	8.00
12P	19.06	18.06	10.00
14P	21.06	20.06	12.00
16P	23.06	22.06	14.00
20P	27.06	26.06	18.00
22P	29.06	28.06	20.00
24P	31.06	30.06	22.00
26P	33.06	32.06	24.00

	AR寸	BR寸	CR寸
30P	37.06	36.06	28.00
32P	39.06	38.06	30.00
34P	41.06	40.06	32.00
36P	43.06	42.06	34.00
40P	47.06	46.06	38.00
44P	51.06	50.06	42.00
50P	57.06	56.06	48.00
60P	67.06	66.06	58.00
64P	71.06	70.06	62.00
68P	75.06	74.06	66.00

SPECIFICATIONS:

Material:

Insulator: LYLON-6T

Insulator color: Black

Contacts: Brass

Contact Plating: Gold Flash over Nickel underplate on contact area. Tin over copper underplate on solder tails.

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC / minute

Mechanical:

Mating durability: 500 cycles min


Temperature Rating:

Operating temperatures: -40° to +105°

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260° for 5 second



SEC B-B

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MB-DD080-xxx-LF
SERIES LEADFREE
006-068 WAY
DIP 8.0mm
DIP 180°

DESCRIPTION: