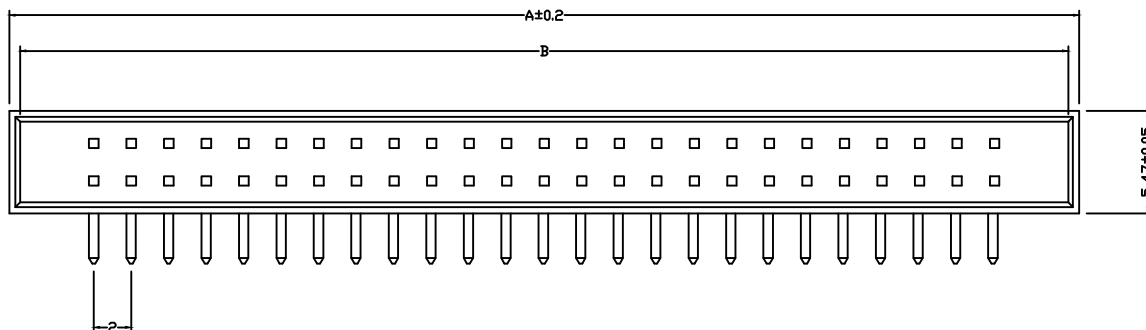
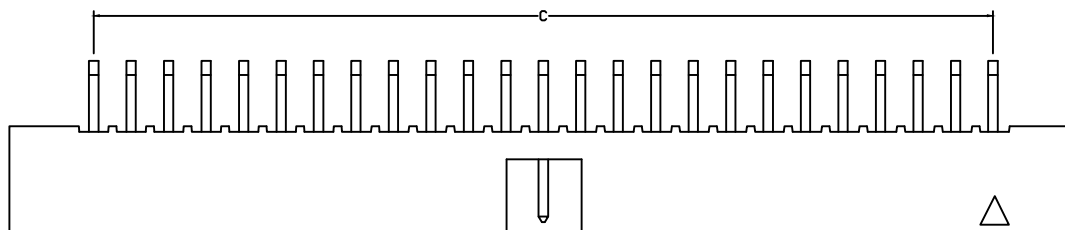


SEC B-B

SPECIFICATIONS:

Material:

Insulator: Nylon 6T

Insulator color: Black

Contacts: Brass

Contact Plating:

30U" Gold Flash over Nickel underplate on contact area. Tin over copper underplate on solder tails.

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC / minute

Mechanical:

Mating durability: 500 cycles min

Temperature Rating:

Operating temperatures: -40° to +105°

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 250° for 5 second

	A尺寸	B尺寸	C尺寸
6P	13.06	12.06	4.00
8P	15.06	14.06	6.00
10P	17.06	16.06	8.00
12P	19.06	18.06	10.00
14P	21.06	20.06	12.00
16P	23.06	22.06	14.00
20P	27.06	26.06	18.00
22P	29.06	28.06	20.00
24P	31.06	30.06	22.00
26P	33.06	32.06	24.00

	A尺寸	B尺寸	C尺寸
30P	37.06	36.06	28.00
32P	39.06	38.06	30.00
34P	41.06	40.06	32.00
36P	43.06	42.06	34.00
40P	47.06	46.06	38.00
44P	51.06	50.06	42.00
50P	57.06	56.06	48.00
60P	67.06	66.06	58.00
64P	71.06	70.06	62.00
68P	75.06	74.06	66.00

RoHS Compliant

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MB-RS30-xxx-LF
 SERIES LEADFREE
 006~068WAY
 SEMI GOLD 30u"
 DIP 90°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com