
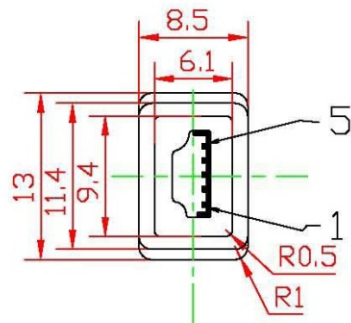
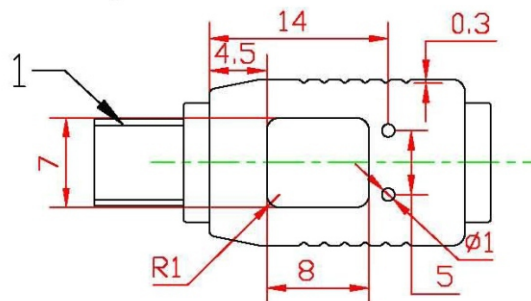


PIN ASSENGMENT

5M	—	MICRO AB/F
1	—	1
2	—	2
3	—	3
5	—	5
SHELL	—	SHELL

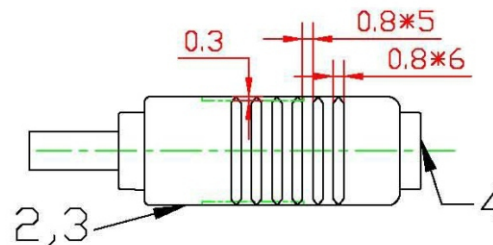

MICRO USB AB F

ELECTRONIC TEST:
 1.OPEN/SHORT/INTERMITTE:100%.
 2.INSULATION RESISTANCE:5MΩ.
 3.CONTACT RESISTANCE:10Ω
 4.HI-POT:300V DTAGE.

4	MICRO USB-AB TYPE FEMALE GRAY PASTERN CONTACT PLATED: GOLD FLASH	PCS	1
3	INNER WIRE:UL1007 30AWG	PCS	5
2	PVC 55P MOLD BLACK IN COLOR	SET	1
1	MINI USB 5 PIN B TYPE MALE SHELL PLATED:NICKEL CONTACT:GOLD FLASH	PCS	1
NO.	DESCRIPTION	UNIT	QT'Y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

MBMIB-EM-5B5AB-LF

SERIES

LEADFREE

5 PIN B TYPE TO 5 PIN AB TYPE

MOLDING

MALE TO FEMALE

DESCRIPTION: