


5M(B)

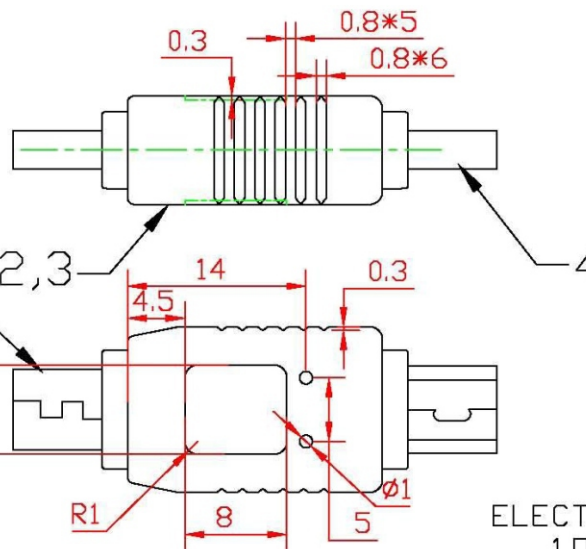

PIN ASSENGMENT

MICRO BM	—	5M
1	—	1
2	—	2
3	—	3
5	—	5
SHELL	—	SHELL

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.INSULATION RESISTANCE:5MΩ
- 3.CONTACT RESISTANCE:10Ω.
- 4.HI-PDT:300V DTAGE.

4	MINI USB 5P MALE B TYPE SHELL PLATED NICKEL CONTACT:G/F	PCS	1
3	INNER WIRE:UL1007 30AWG	PCS	
2	PVC 55P MOLD BLACK IN COLOR	SET	1
1	MICRO USB B TYPE MALE SHELL PLATED NICKEL CONTACT:G/F	PCS	1
NO.	DESCRIPTION	UNIT	QT'Y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MBMIB-MM-5B5B-LF

SERIES | LEADFREE
5 PIN B TYPE TO 5 PIN B TYPE
MOLDING
MALE TO MALE

DESCRIPTION: