



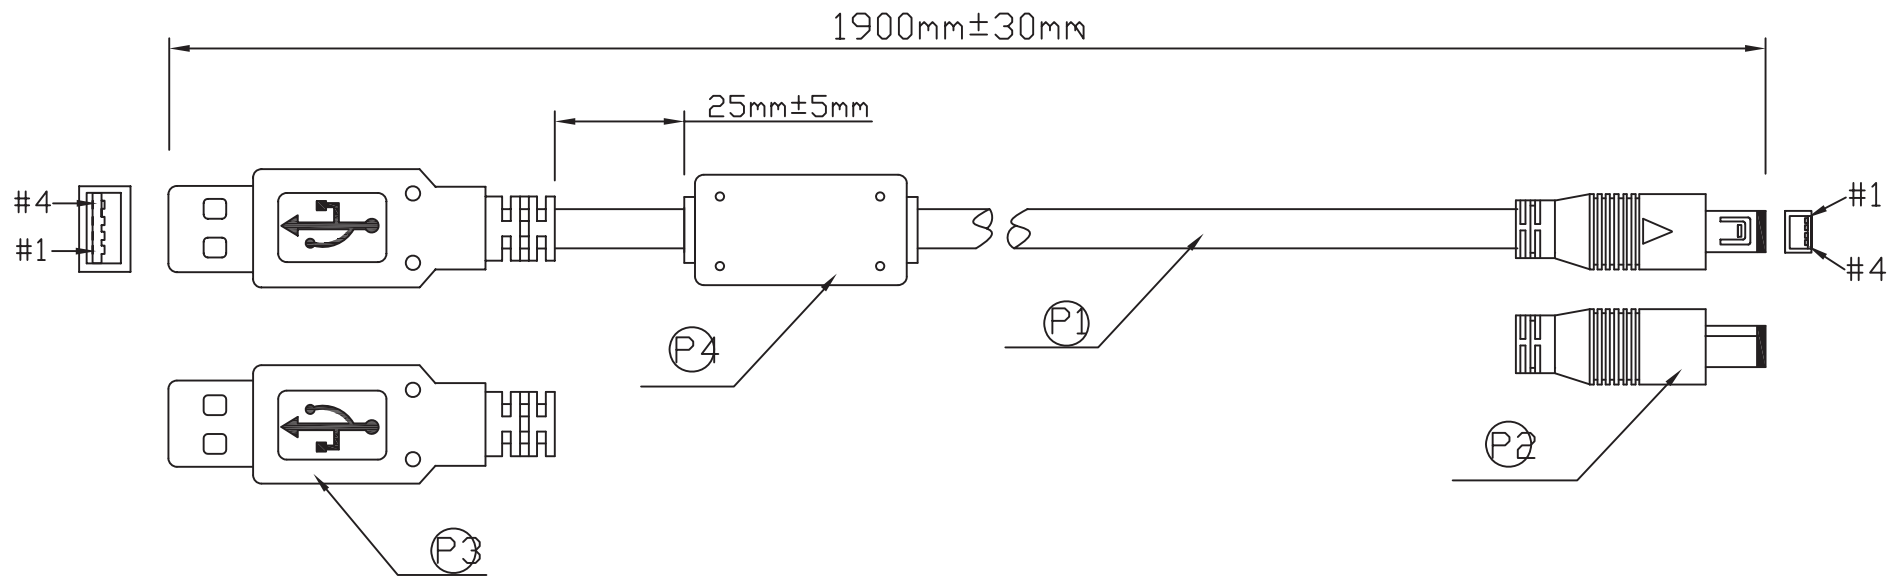

PIN ASSIGNMENT

USB AM		USB 5P
1 — RED		1
2 — WHITE		2
3 — GREEN		3
4 — BLACK		4
G		G

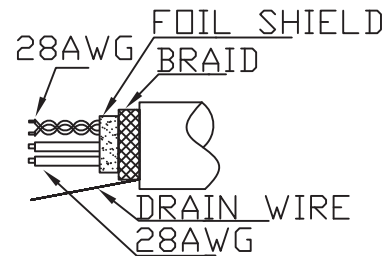

1	P1" UL2725 CABLE 28AWG/2C+28AWG/1PR OD=3.5
2	P2" MINI USB 4P 單防保
3	P3" USB A/M SOLDER 30u WHITE
4	CORE 16*28.5*7.9mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

MBUB-4H4A28FC-M1M9-LF

SERIES

LEADFREE

1900mm

MALE TO MALE

FERRITE CORE

28 AWG

4 PIN H TYPE TO 4 PIN A TYPE

DESCRIPTION: USB A/MINI B CABLE 1.9M GRAY