


WIRING DIAGRAM

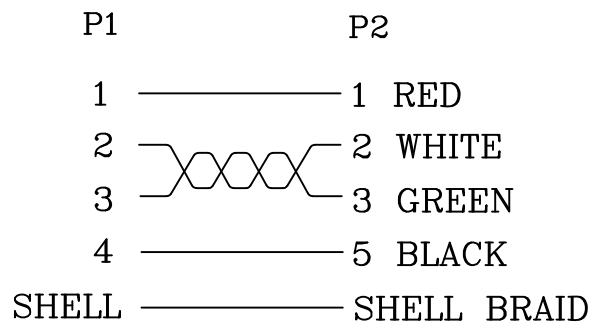

NO.	PART NO.	Q'TY	UNITS	DESCRIPTION
4	PVC	10	G	#WHITE 45P PVC
3	CONN.P2	1	SET	MINI USB 5P B TYPE MALE G/F BK (超薄)
2	CONN.P1	1	SET	USB A TYPE MALE G/F WHITE
1	CABLE	2440	mm	UL2725 28AWG*1P+28AWG*2C+AEB(4/16) OD:3.5±0.15mm #BLACK (VENDER FOR UL2725 USB1.1 APPROVED)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X. ± 0.30
CHECKED BY GENIUS		.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XX ± 0.20
DATE		.XXX ± 0.10
		ANG ± 1°
SIZE A4	P PROJECTION	



ORDER INFORMATION

MBUB-5B4A28-M1M2-LF
SERIES | LEADFREE
| 1200mm
| MALE TO MALE
28AWG
5B TO 4A TYPE

DESCRIPTION: USB A M/MINI USB 5P M L:1.2M BLACK