


WIRING DIAGRAM

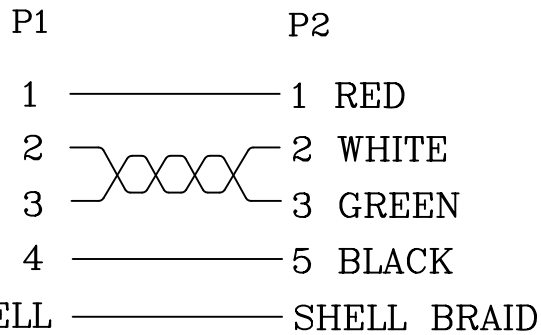

| 4 | PVC | 10 | G | #WHITE 45P PVC |
|-----|----------|------|-------|---|
| 3 | CONN.P2 | 1 | SET | MINI USB 5P B TYPE MALE G/F BK(超薄) |
| 2 | CONN.P1 | 1 | SET | USB A TYPE MALE G/F WHITE |
| 1 | CABLE | 2440 | mm | UL2725 28AWG*1P+28AWG*2C+AEB(4/16) OD:3.5±0.15mm #BLACK (VENDER FOR UL2725 USB1.1 APPROVED) |
| NO. | PART NO. | Q'TY | UNITS | DESCRIPTION |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MBUB-5B4A28-M1M8-LF

SERIES

LEADFREE

1800mm

MALE TO MALE

28AWG

5B TO 4A TYPE

DESCRIPTION: USB A M/MINI USB 5P M L:1.8M BLACK