


PACKING: 单PCS如下图包装。

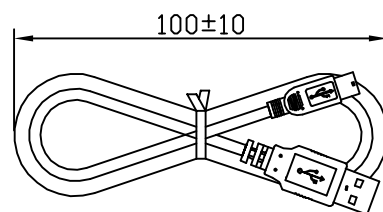

P1	P2
1	1 RED (红)
2	2 WHITE (白)
3	3 GREEN (绿)
4	5 BLACK (黑)
SHELL	BRAID SHELL (编织)

DC:500V COND:2Ω LS:20M Ω

		1	PCS
4	PVC:45P 黑色		KG/K
3	MINI USB BM:GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:BLACK	1	SET
2	USB AM:GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:WHITE	1	SET
1	CABLE:UL2725 28AWG*1P+28AWG*2C+ABE OD:3.5MM 黑色外被 L=920MM	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MBUB-5B4A28-M3F-LF

SERIES

LEADFREE

920mm

MALE TO MALE

28 AWG

4 PIN A TYPE

5 PIN B TYPE

DESCRIPTION: USB AM TO MINI5P L=920MM