
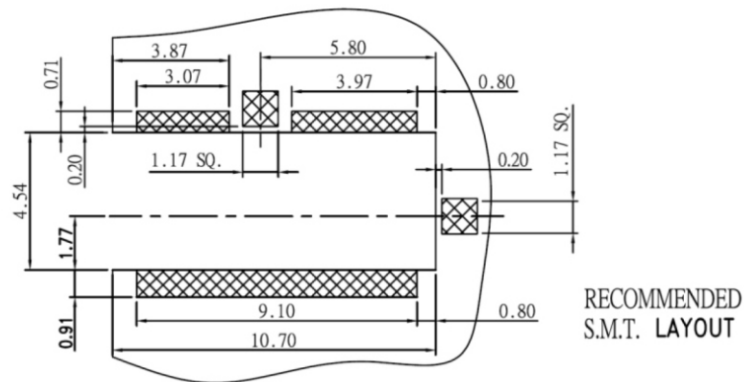


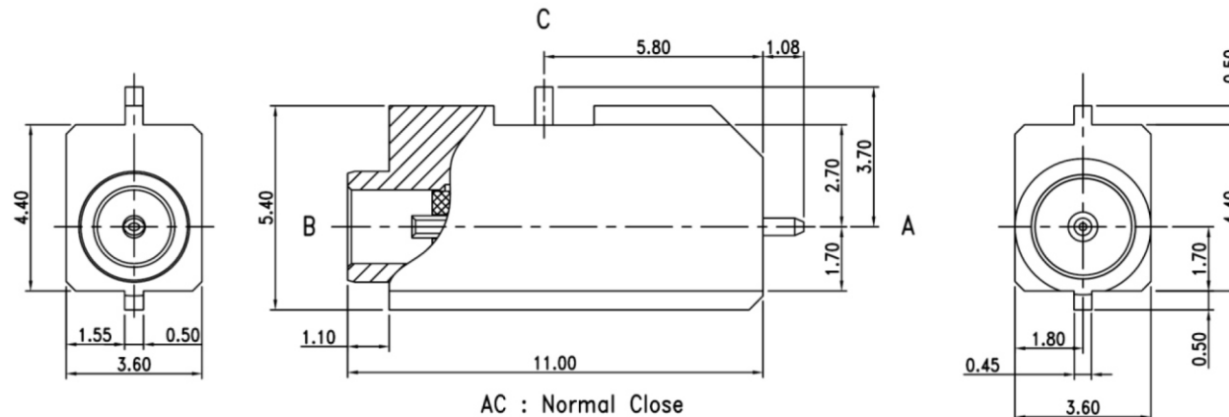

SPECIFICATIONS:

1. OPERATION FREQUENCY: 0 TO 6 GHz
2. IMPEDANCE: 50 OHMS
3. VSWR IN 2 TO 3 GHz : 1.3 MAX
4. GOLD PLATED: 3 microinches (Body, Ring)
5. GOLD PLATED: 30 microinches (Pin)
6. MATING FORCE: 4KG MAX.
7. UNMATING FORCE: 0.6 KG MIN.
8. INSULATION RESISTANCE: 1000 M OHMS MIN.
9. DURABILITY: 500 CYCLES MIN.
10. TEMPERATURE RANGE: -65°C ~ +165°C

9	spring		1	SUS303	NONE
8	ring		1	BRASS	GOLD
7	dielectric	⊗	1	LCP+玻纖30%	NONE
6	dielectric		1	PTFE	NONE
5	dielectric	⊗	1	PTFE	NONE
4	dielectric		1	PTFE	NONE
3	pin		1	BeCu	GOLD
2	pin	⊗	1	BeCu	GOLD
1	body		1	BRASS	GOLD
ITEM	DESCRIPTION		QTY	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MCCD-JWSW-50-LF

SERIES | | | LEADFREE
50 OHM
SWITCH
90°SMT
JACK

DESCRIPTION:

www.morethanall.com