

FEATURES

MAT'L:BODY: NORYL 94V-1

CONTACT: BRASS GOLD PLATED

CURRENT RATING: 3A AC,DC

VOLTAGE RATING: 250V AC,DC


TEMPERATURE RANGE:-40°C TO +105°C

Contact resistance: Initial value / 10m ohm Max.

After environmental testing / 30mohm Max.

Insulation resistance: 5000M OHM MIN.

Withstanding voltage: 1000V AC / minute

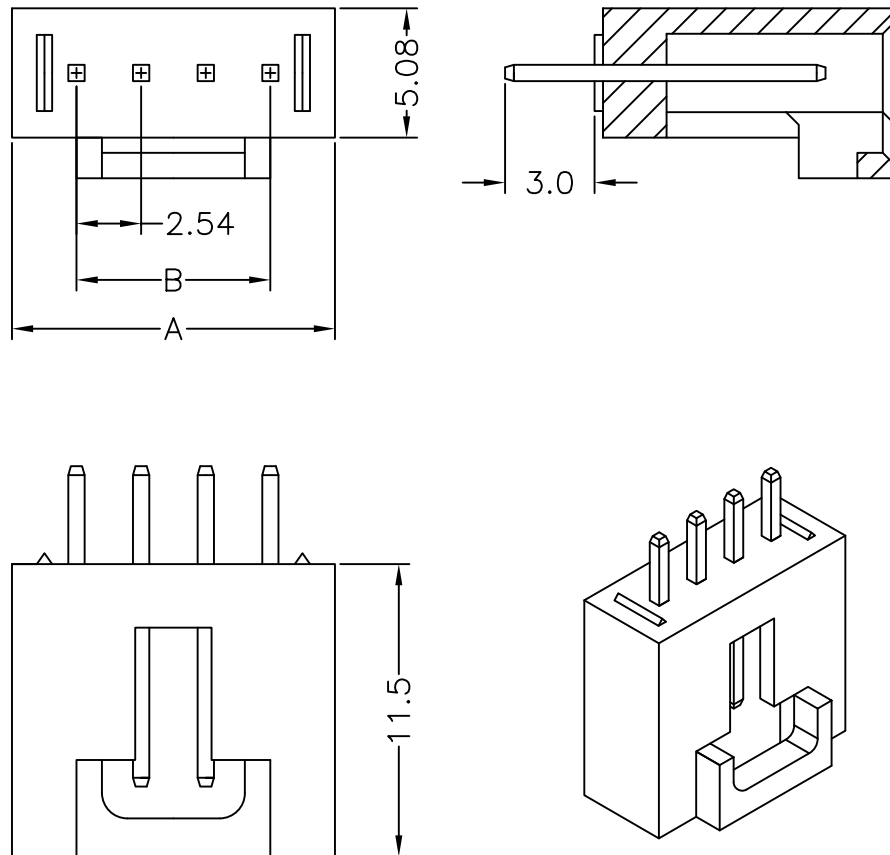

CIRCUITS	PART NO.	DIMENTION	
		A	B
2	MCG-D30G-1X02	7.62	2.54
3	MCG-D30G-1X03	10.16	5.08
4	MCG-D30G-1X04	12.70	7.62
5	MCG-D30G-1X05	15.24	10.16
6	MCG-D30G-1X06	17.78	12.70
7	MCG-D30G-1X07	20.32	15.24
8	MCG-D30G-1X08	22.86	17.78
9	MCG-D30G-1X09	25.40	20.32
10	MCG-D30G-1X10	27.94	22.86
11	MCG-D30G-1X11	30.48	25.40
12	MCG-D30G-1X12	33.02	27.94
13	MCG-D30G-1X13	35.56	30.48
14	MCG-D30G-1X14	38.10	33.02
15	MCG-D30G-1X15	40.64	35.56
16	MCG-D30G-1X16	43.18	38.10
17	MCG-D30G-1X17	45.72	40.64
18	MCG-D30G-1X18	48.26	43.18

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MCG-D30G-1Xxx-LF
SERIES
LEADFREE
1X02:02WAY
1X18:18WAY
GOLD
DIP 3.0mm
DIP 180°

DESCRIPTION: 2.54mm MCG DIP 180°