
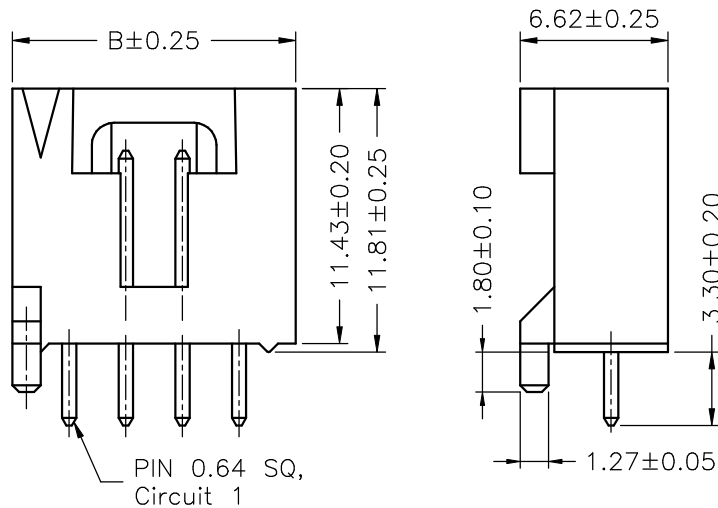
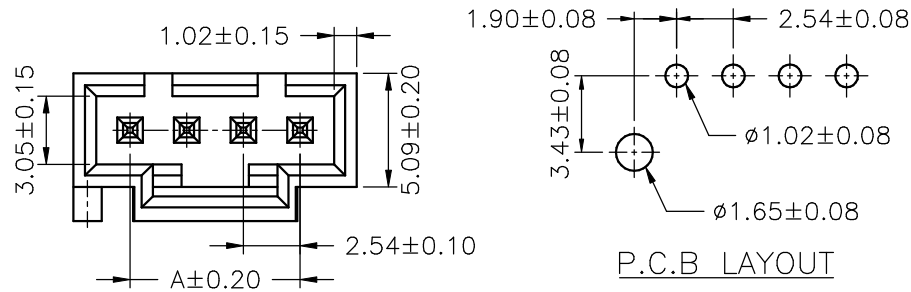


3P



SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Gold-flash
 Material: PBT30%GF,UL94V-0
 Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MCG-DP1-1X03	5.08	10.17
MCG-DP1-1X04	7.62	12.71
MCG-DP1-1X05	10.16	15.25
MCG-DP1-1X06	12.70	17.79
MCG-DP1-1X07	15.24	20.33
MCG-DP1-1X08	17.78	22.87
MCG-DP1-1X09	20.32	25.41
MCG-DP1-1X10	22.86	27.95
MCG-DP1-1X11	25.40	30.49
MCG-DP1-1X12	27.94	33.03

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, \pm
 .X \pm
 .XX \pm
 .XXX \pm
 ANG \pm

PJECTION

照片框

ORDER INFORMATION

MCG-DP1-1Xxx-LF
 SERIES | LEADFREE
 | 1X03:03WAY
 | 1X12:12WAY
 | POST
 | DIP 180°

DESCRIPTION: 2.54mm PITCH 180° WAFER