

SPECIFICATIONS

Current Rating:

3 Amp

Current Voltage:

250V

Current Resistance:

20mΩ Max.

Insulator Resistance:

1000 Megohms Min.

Dielectric Withstanding Voltage:

600V AC/minute

Operating Temperature:

-40°C ~ +105°C

Insulator Material:

PBT UL 94V-0

Color: Black

Contact Material:





Brass

Finish:

Duplex plated:

Gold plated on contact area

Tin on solder area

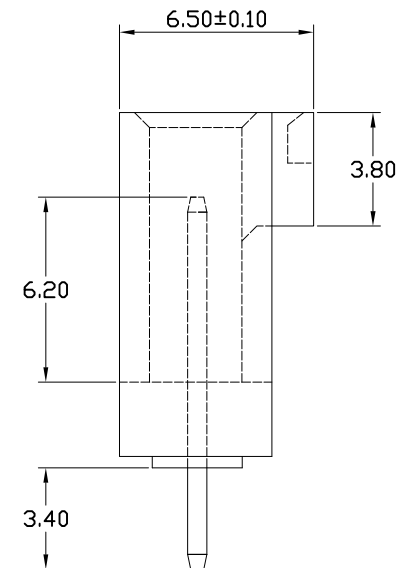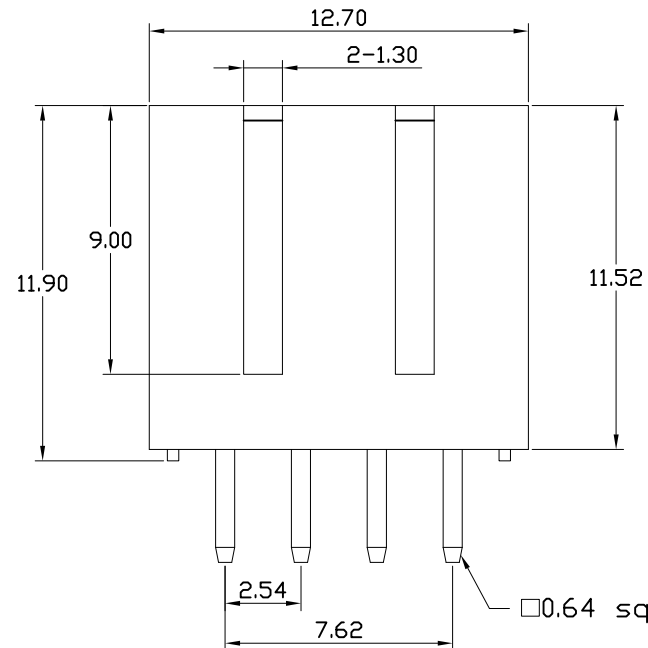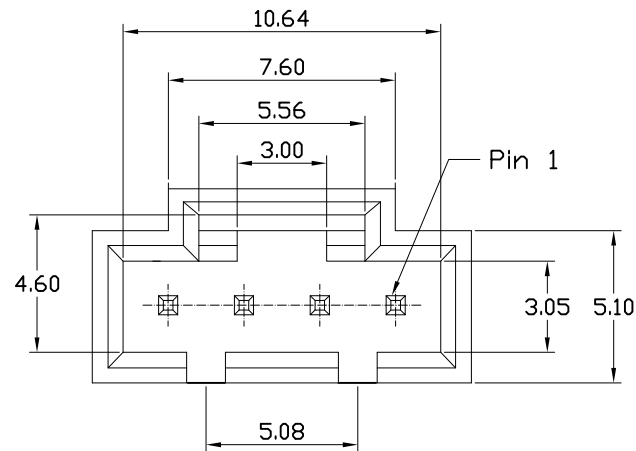

RECOMMENDED P. C. B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

MCG-DS30-1X04-LF
SERIES LEADFREE
04 WAY
SEMI GOLD 30u"
DIP 180°

DESCRIPTION: