
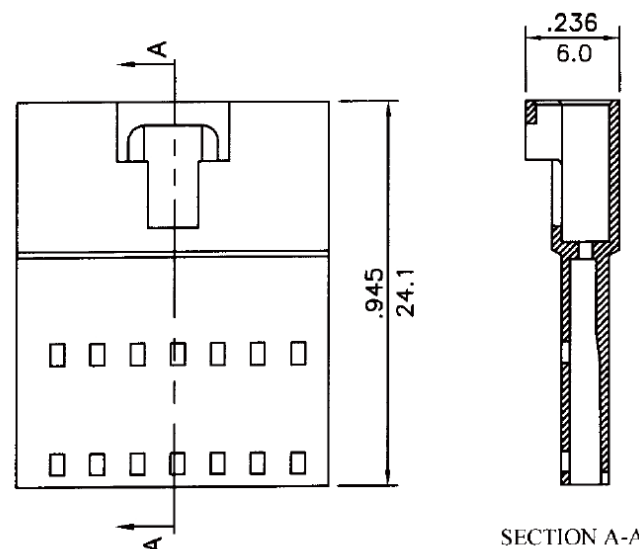
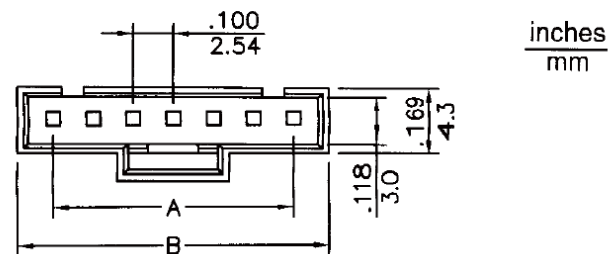


- \* Poles:2-15
- \* Material:PBT UL94V-0 ,BLACK

### Specifications

- \* Current rating: 2.5A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 800V AC/minute

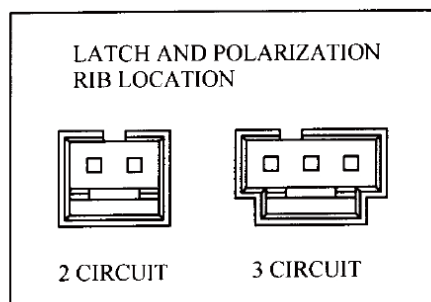

| CIRCUITS | PART NO.   | DIMENSION in.(mm) |             | CIRCUITS | PART NO.   | DIMENSION in.(mm) |             |
|----------|------------|-------------------|-------------|----------|------------|-------------------|-------------|
|          |            | A                 | B           |          |            | A                 | B           |
| 2        | MCG-P-1X02 | 0.100(2.54)       | 0.280(7.1)  | 9        | MCG-P-1X09 | 0.800(20.32)      | 0.980(24.9) |
| 3        | MCG-P-1X03 | 0.200(5.08)       | 0.382(9.7)  | 10       | MCG-P-1X10 | 0.900(22.86)      | 1.079(27.4) |
| 4        | MCG-P-1X04 | 0.300(7.62)       | 0.480(12.2) | 11       | MCG-P-1X11 | 1.000(25.40)      | 1.181(30.0) |
| 5        | MCG-P-1X05 | 0.400(10.16)      | 0.579(14.7) | 12       | MCG-P-1X12 | 1.100(27.94)      | 1.280(32.5) |
| 6        | MCG-P-1X06 | 0.500(12.70)      | 0.681(17.3) | 13       | MCG-P-1X13 | 1.200(30.48)      | 1.378(35.0) |
| 7        | MCG-P-1X07 | 0.600(15.24)      | 0.780(19.8) | 14       | MCG-P-1X14 | 1.300(33.02)      | 1.445(37.6) |
| 8        | MCG-P-1X08 | 0.700(17.78)      | 0.882(22.4) | 15       | MCG-P-1X15 | 1.400(35.56)      | 1.580(40.1) |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



### ORDER INFORMATION

MCG-P-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X15:15WAY

MALE HOUSING

DESCRIPTION: