





3P

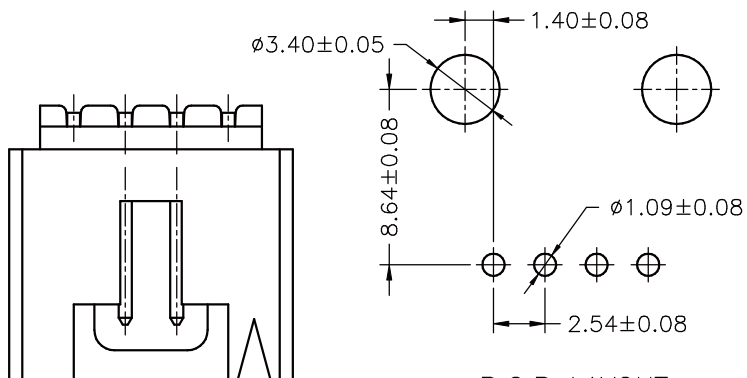

2P



P.C.B. LAYOUT

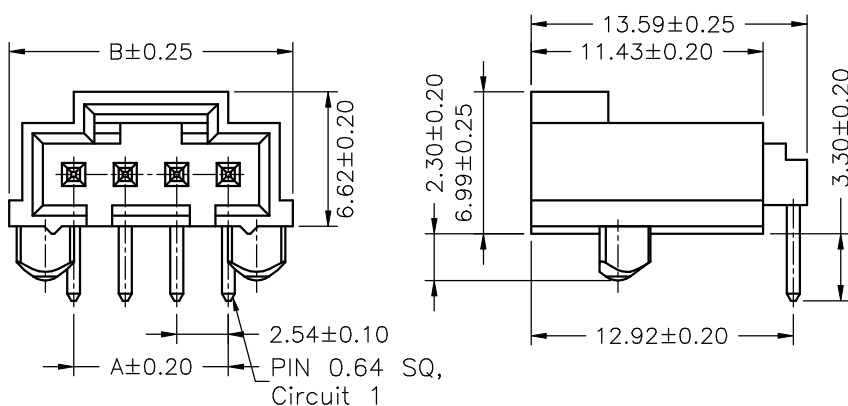

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 20m Ω Max

Insulation Resistance: 1000M Ω Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Gold-flash

Material: PBT30%GF,UL94V-0

Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MCG-RP-1X02	2.54	8.89
MCG-RP-1X03	5.08	11.43
MCG-RP-1X04	7.62	13.97
MCG-RP-1X05	10.16	16.51
MCG-RP-1X06	12.70	19.05
MCG-RP-1X07	15.24	21.59
MCG-RP-1X08	17.78	24.13
MCG-RP-1X09	20.32	26.67
MCG-RP-1X10	22.86	29.21
MCG-RP-1X11	25.40	31.75
MCG-RP-1X12	27.94	34.29

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

MCG-RP-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X12:12WAY
POST
DIP 90°

DESCRIPTION: 2.54mm PITCH 90°WAFER