


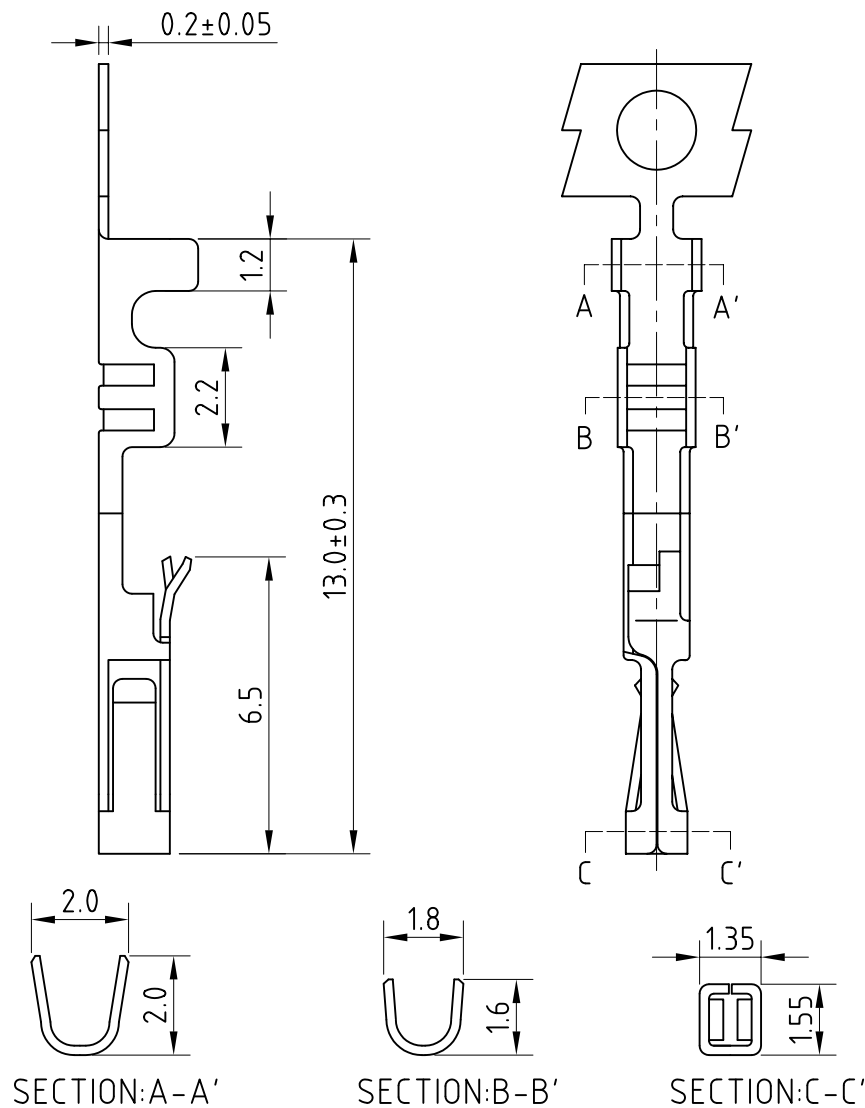

SPECIFICATION:

CURRENT RATING : 3A AC/DC

VOLTAGE RATING : 250V AC/DC

CONTACT RESISTANCE : 20mΩ(max.)

INSULATION RESISTANCE : 1,000MΩMIN

WITHSTAND VOLTAGE : 800V AC/MINUTE

TEMPERATURE RANGE : -25°C TO +85°C

APPLICABLE WIRE : AWG #22 TO #28

CONTACT INFORMATION

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MCG-Tx-22	AWG #22-#28	1.70mm(MAX.)	Phosphor bronze	See note	15,000 pcs

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MCG-Tx-22-LF

SERIES T LEADFREE
22~28 AWG
BLANK: TIN PLATE
G: GOLD PLATE
TERMINAL

DESCRIPTION: