


ELECTRICAL

Frequency Range: 1 GHz

Ipedance: 75 OHM

V.S.W.R: 1.5 Max

Working Voltage::170 vrms max.

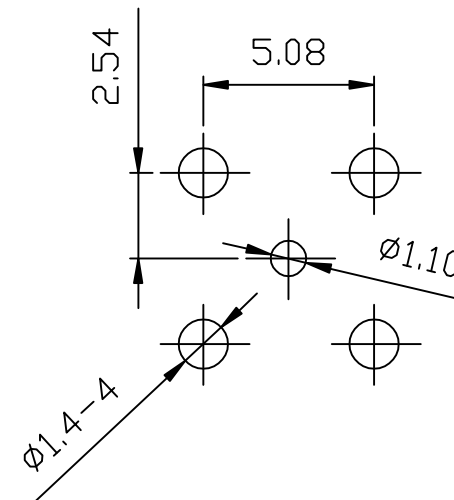

NO	DESCRIPTION	MATERIAL	FINISH	QTY
5	DIELECTRIC	PTFE	NONE	1
4	DIELECTRIC	PTFE	NONE	1
3	PIN	PHO.BRONZE	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1

脆盤包裝 48孔
每盤裝 240PCS
目前沒TAPER EEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

0.5-5	=±0.2
5-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4

照片框

ORDER INFORMATION

MCX-JR-75-LF
SERIES | LEADFREE
75 OHM
DIP 90°
JACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MCX R/A JACK PCB MOUNT 75 OHM