
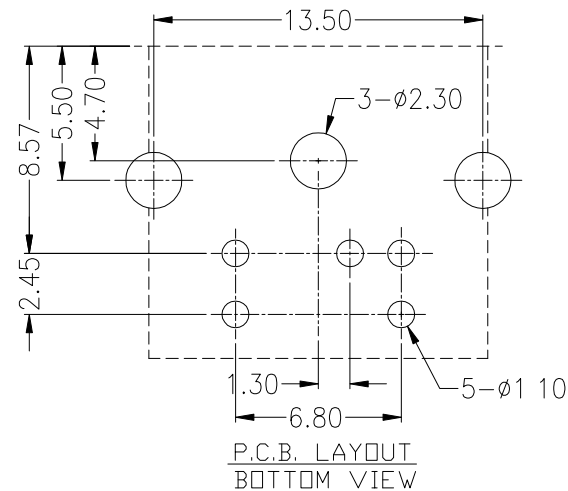
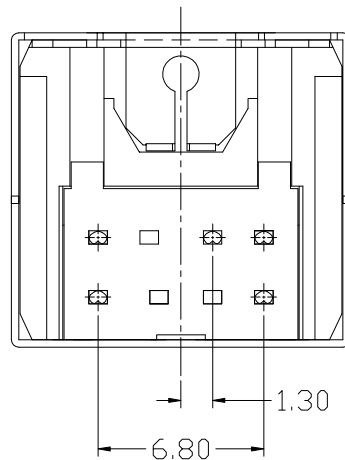


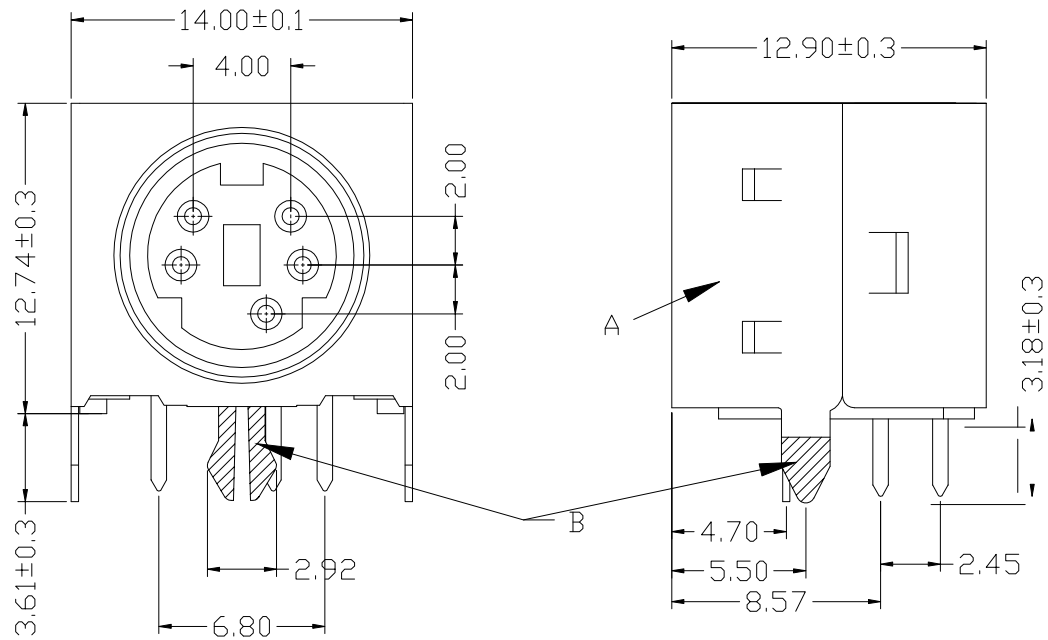

MATERIAL

INSULATOR: PBT UL 94V-0

SHELL: Nickel/Tin plated Or Tin Plated

CONTACT: Phosphor Bronze, Gold/Tin plated

ENVIRONMENTAL

OPERATING TEMPERATURE: -55°C~+105°C

ELECTRICAL

CONTACT CURRENT RATING: 1 Amp

DIELECTRIC WITHSTANDING : AC 500V/min. R.M.S.

INSULATION RESISTANCE: 500M Ω min. at 500V DC

CONTACT RESISTANCE: 30m Ω Max

MDJ-F-05-LF

LEADFREE

RoHS Compliant

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MDJ-F-05-LF
SERIES | T LEADFREE
05 WAY
FULL METAL

DESCRIPTION: 迷你單層5P母半金黑(鐵殼鍍錫無嘜不加彈) 無毒