
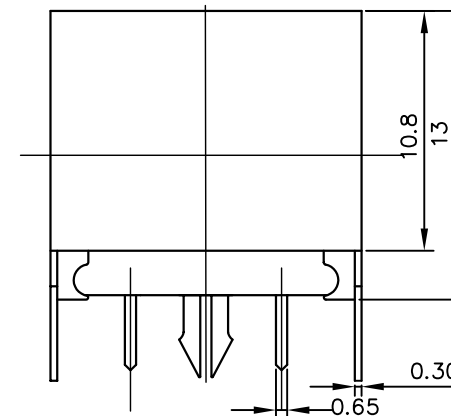
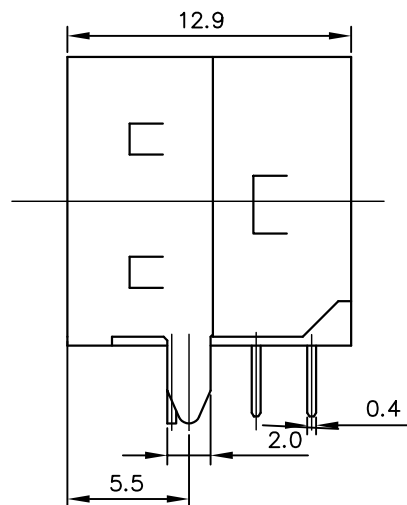


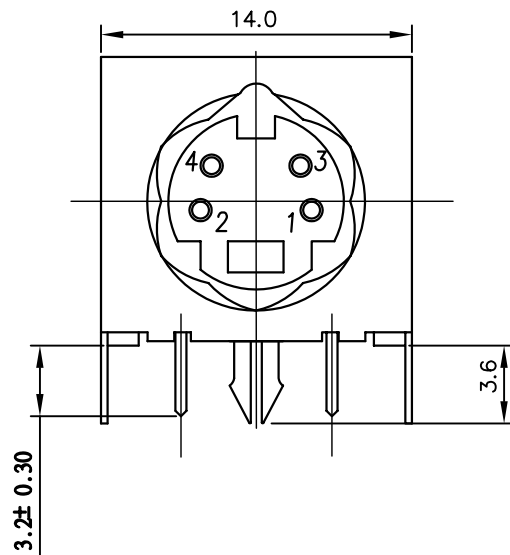

備註 NOTE:

1.材質 MATERIAL:

SHELL :C2680H Brass Strip t=0.3mm(銅)

HOUSING :PBT 30% GLASS

PIN :C5191 t=0.2mm(磷銅)

2.電鍍 PLATING:

SHELL : 銅 50u"min 鍍鉛 120u"min

PIN :Under Plate 50u"min. Nickel All Over
120u"min.Tin/Lead in Soldering Area
Selective Gold Plated in Contact Area.

3.SPECIFICATIONS:

Electrical:

Current Rating:100V AC 1A MAX. 12V DC 2A MAX.

Insulation Resistance:500MΩMIN. at 500V DC

Dielectric Strength:500V AC/1 minute



Contact Resistance:30 mΩMAX.

Mechanical:

Insertion Force:4.5KG MAX.

Withdrawal Force:0.9KG ~3.0 KG

Contact Retention Force:1.02KG MIN.

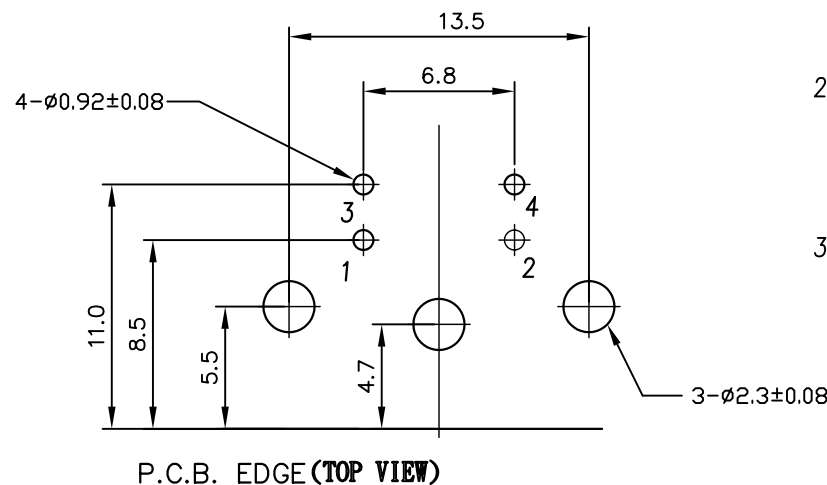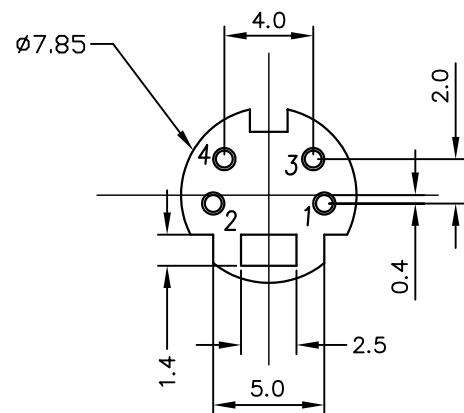

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MDJ-FL-04-LF
SERIES T LEADFREE
04 WAY
LOCK
FULL METAL

DESCRIPTION: LOCK PCB 4P