
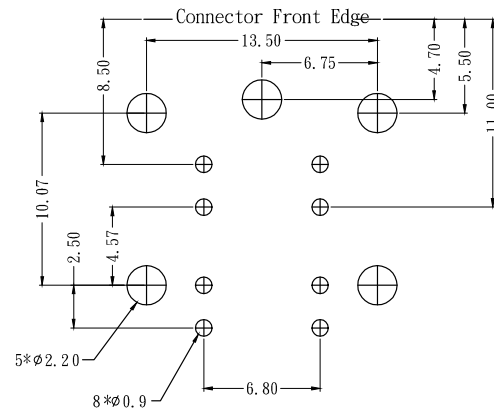
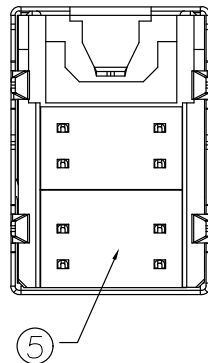
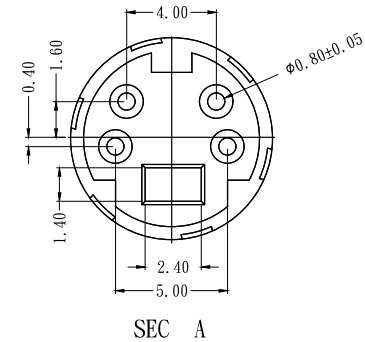
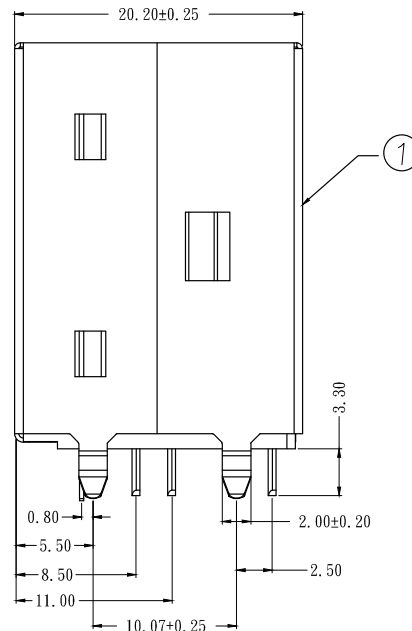


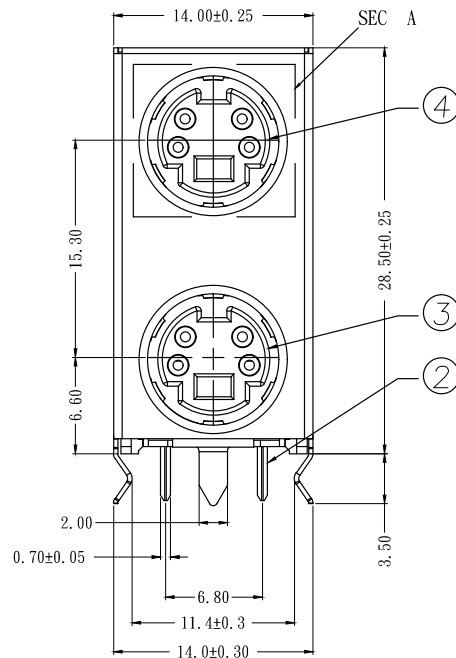

Printed Circuit Board (PCB) Layout

5	COVER	PBT+30%G.F, UL94V-0		BLACK
4	MID-UPWARD	PBT+30%G.F, UL94V-0		BLACK
3	MID-DOWN	PBT+30%G.F, UL94V-0		BLACK
2	CONTACT	COPPE RALLOY T=0.20	Au1u" PLATING ON CONTACT AREA. 100u" Tin PLATING ON SOLDER TAIL AREA. 50u" NICKEL UNDERPLATING OVERALL.	
1	SHELL	SPCC-SD T=0.30	BRIGHT Tin 100u" Min OVER Ni 50u" Min	
	NAME	MATERIAL	PLATING	COLOR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MDJB1-F-04-LF

SERIES

LEADFREE

04 WAY

FEMALE

DESCRIPTION: 雙層 MINI DIN