
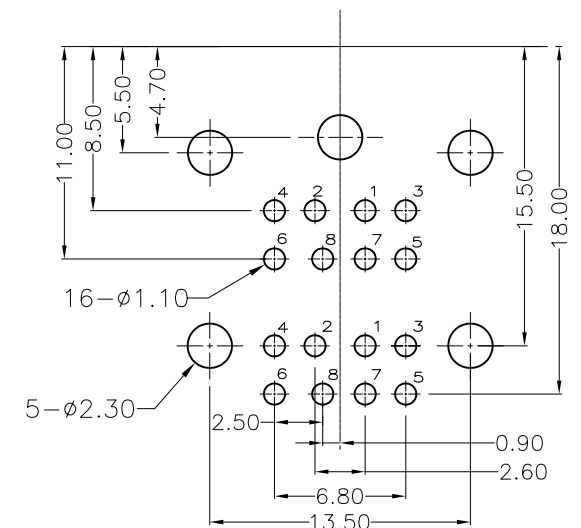


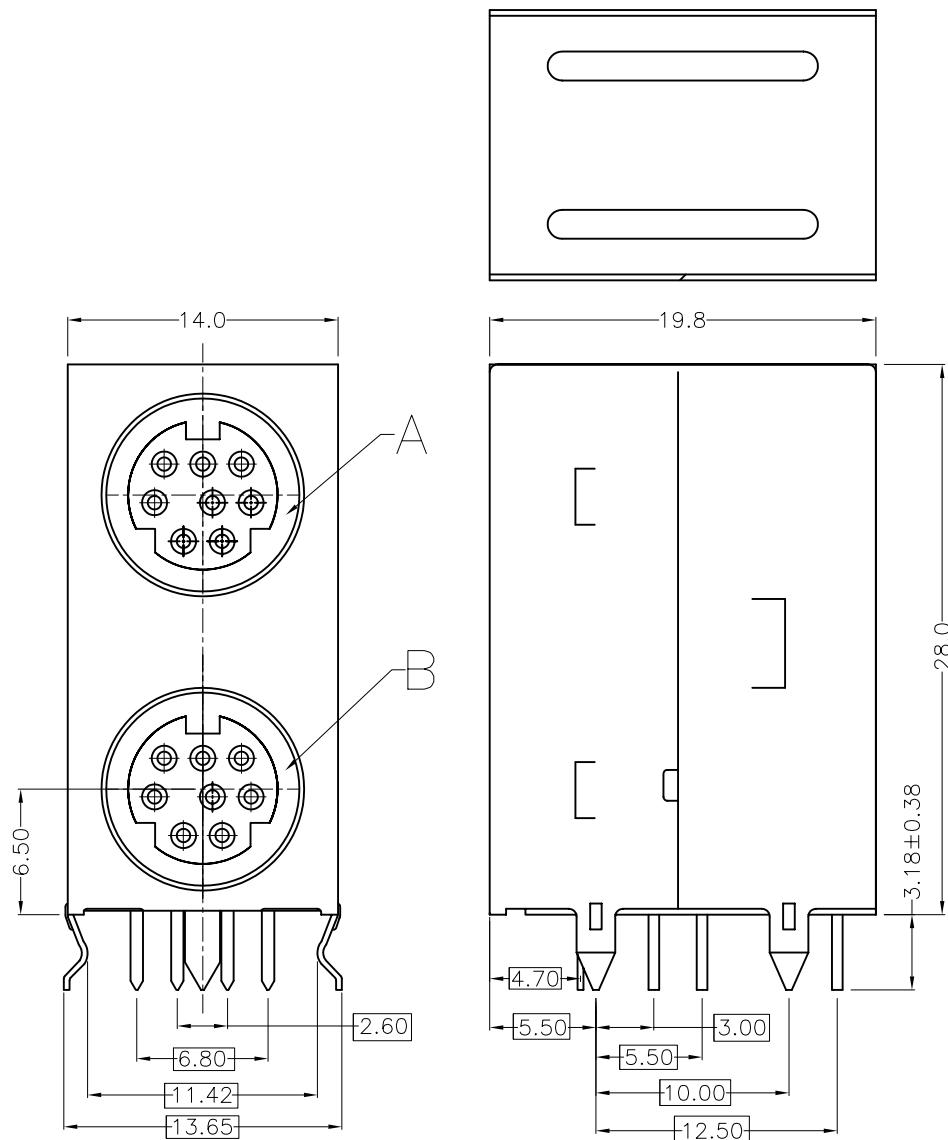

RECOMMENDED PCB LAYOUT

PCB TOLERANCE ±0.10

MATERIAL
 INSULATOR: PBT UL94V-0
 CONTACT: Phosphor Bronze, Gold/Tin plated
 SHELL: Brass(0.3T), TIN OR NICKEL PLATED
 ENVIRONMENTAL
 OPERATING TEMPERATURE: -55°C ~ +105°C
 ELECTRICAL
 CONTACT CURRENT RATING: 1 Amp
 DIELECTRIC WITHSTANDING: AC 500V min. Per minute
 INSULATION RESISTANCE: 500MΩ min.
 CONTACT RESISTANCE: 30mΩ Max
 MAX PROCESSING TEMPERATURE:
 60 SECONDS IN 230°C AND 10 SECONDS IN 260°C
 ALL MATERIALS/PROCESSES ARE ROHS COMPLIANT

PART NO	A COLOR	B COLOR	SHELL PLATED	SHELL MATERIAL
MDJB1-F99-08	GREEN(3395C)	PURPLE(2715C)	NICKEL PLATED	BRASS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X ± 0.30
 X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MDJB1-F99-08-LF

SERIES

LEADFREE

08 WAY

PC99
 FEMALE

DESCRIPTION: