


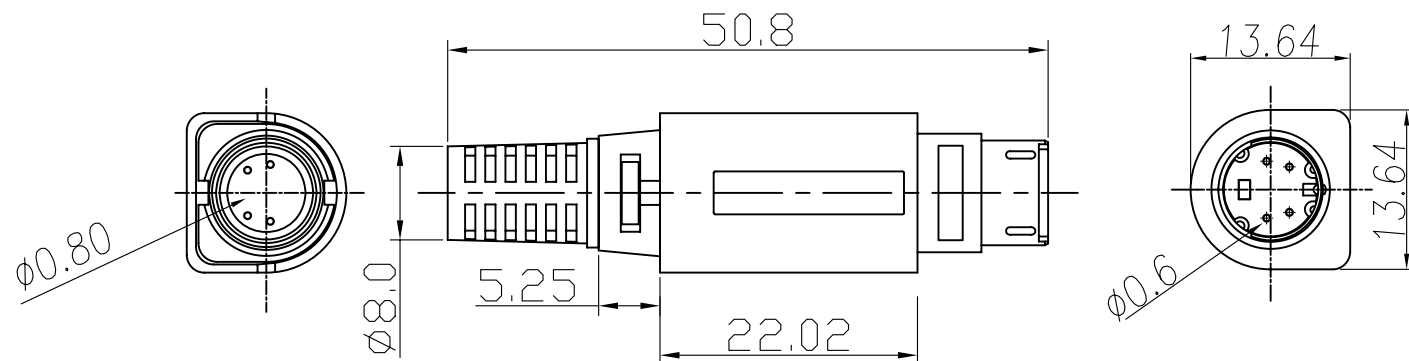

備註 /NOTE:

1. 安規 /SAFETY:



- 1-1. 規格 /RATING: 100V AC MAX or 12V DC 2A MAX
- 1-2. 絕緣阻抗 /INSULATION RESISTANCE: 50M ohm MIN at 250V DC
- 1-3. 絕緣耐壓 /WITHSTANDING: 250V AC at 1 MINUTE

2. 材質 /MATERIAL:

- 2-1. 外套 /PLASTIC COVER:ABS
- 2-2. 銅管 /SHELL: 黃銅 /BRASS
- 2-3. 塑膠罩腳 /POM RING:POM
- 2-4. 膠芯 /HOUSING:PBT
- 2-5. 針 /PIN:黃銅 /BRASS
- 2-6. 彈簧 /SPRING: 鋼 /STEEL
- 2-7. 後套 /METAL CAP: 黃銅 /BRASS

3. 電鍍 /PLATING:

- 3-1. 銅管 /SHELL: 鍍 /NICKEL
- 3-2. 針 /PIN: 表金 /Gold Flash
- 3-3. 彈簧 /SPRING: 鍍 /NICKEL
- 3-4. 後套 /METAL CAP: 鍍 /TIN

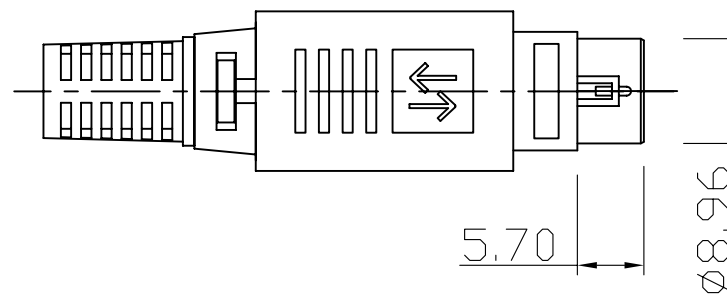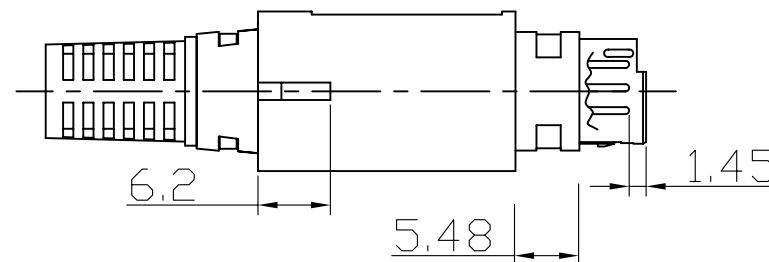

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MDL-P-04-LF
SERIES T LEADFREE
04 WAY
MALE

DESCRIPTION: MD 4P LOCKING 8PARTS ASS'Y TYPE