

LOCK 6P (S)
LOCK 6P (S)
DESCRIPTION









TABLE A

Ø7.0	10.8	LOCK後套(鍍)Ø7.0
Ø6.5	11.3	LOCK後套(鍍)Ø6.5
Ø6.2	10.9	LOCK後套(鍍)Ø6.2
Ø5.8	11.1	LOCK後套(鍍)Ø5.8
Ø5.3	11.5	LOCK後套(鍍)Ø5.3
A	L	DESCRIPTION

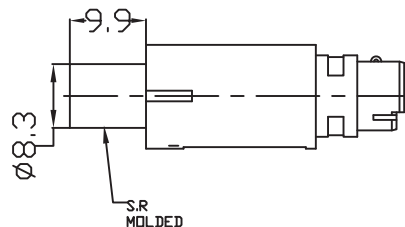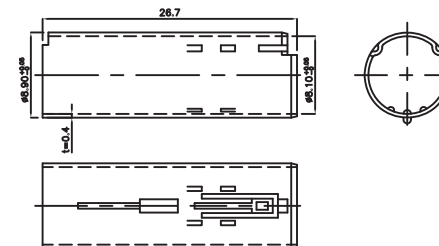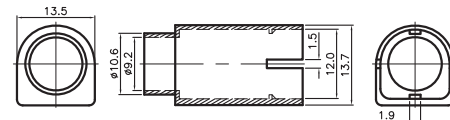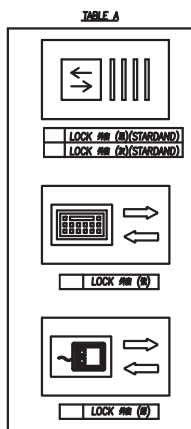

備註/NOTE:

1. 安裝/SAFETY:
 - 1-1. 規格/RATING: 100V AC MAX or 12V DC 2A MAX
 - 1-2. 絕緣阻抗/INSULATION RESISTANCE: 50MΩ MIN at 250V DC
 - 1-3. 絕緣耐壓/WITHSTANDING: 250V AC at 1 MINUTE
2. 材質/MATERIAL:
 - 2-1. 外殼/PLASTIC COVER: ABS
 - 2-2. 銅殼/SHELL: 黃銅/BRASS
 - 2-3. 塑膠環/POM RING: POM
 - 2-4. 膠芯/HOUSING: PBT
 - 2-5. 針/PIN: 黃銅/BRASS
 - 2-6. 彈簧/SPRING: 鋼/STEEL
 - 2-7. 後套/METAL CAP: 黃銅/BRASS

3. 電鍍/PLATING:
 - 3-1. 銅殼/SHELL: 鍍/NICKEL
 - 3-2. 針/PIN: 鍍金/Gold Flash
 - 3-3. 彈簧/SPRING: 鍍/NICKEL
 - 3-4. 後套/METAL CAP: 鍍/TIN
4. 拉拔力/STRENGTH:
 - 4-1. 退針拉力/STRENGTH of UNLOAD PIN: 2.5kgf MIN
5. 不可有針出水或缺料現象
6. 不可變形
7. 不可缺針

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDL-PMxx-06-LF

SERIES LEADFREE

MALE MOLDING

53:5.30

58:5.80

62:6.20

65:6.50

70:7.00

DESCRIPTION: LOCKING 6P MALE ASS'Y