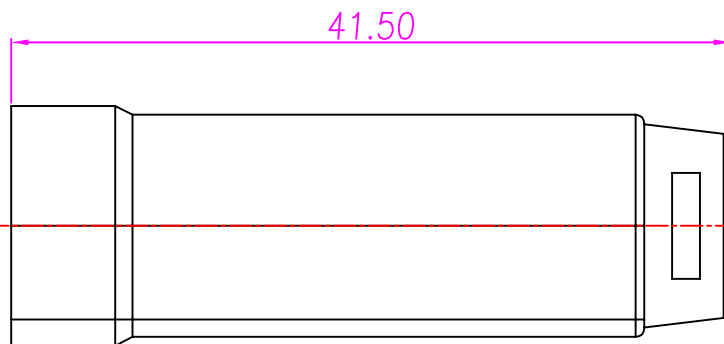
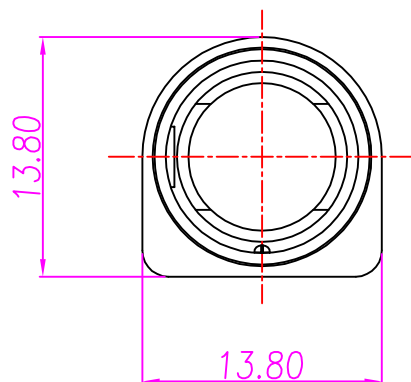
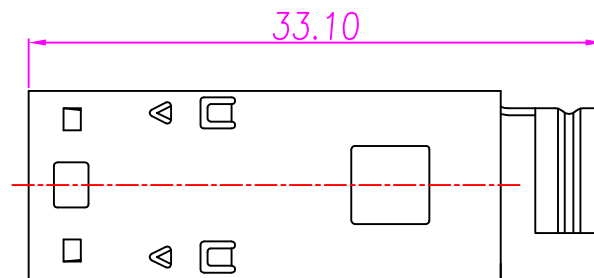





1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. SHELL : BRASS
 - 1-4. BODY : ABS
 - 1-4. SR : PVC
2. FINISH :
 - 2-1. CONTACT : TIN PLATING OVER NICKEL
 - 2-2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELETRICAL SPECIFICATION :
 - 3-1. RATING CURRENT : 4P 7.5A
3P PIN1~2 7.5A
3P PIN3 1A
 - 3-2. RATING VOLTAGE : 20V DC
4. ENVIRONMENTAL :
 - 4-1. OPERATION TEMPERATURE : -20 ℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°



ORDER INFORMATION

MDP-JA-04-LF
SERIES | LEADFREE
04 WAY
ASSEMBLY
JACK

DESCRIPTION: POWER DIN 4P (F) ~~MDP-JA-04-LF~~ OD7.0