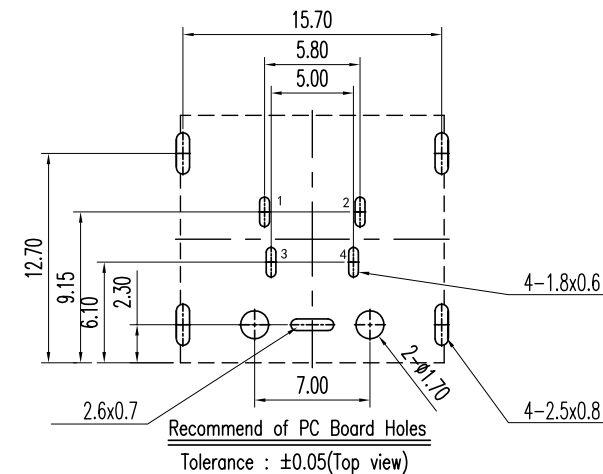
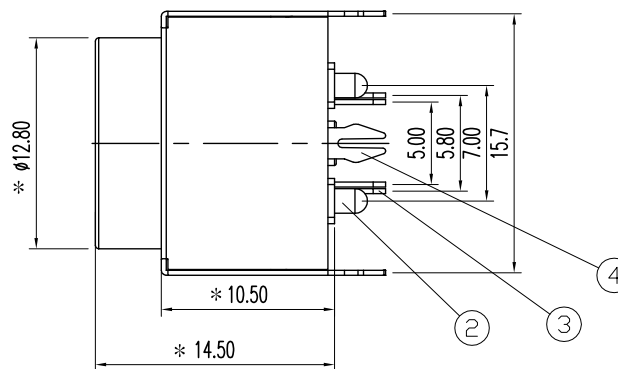
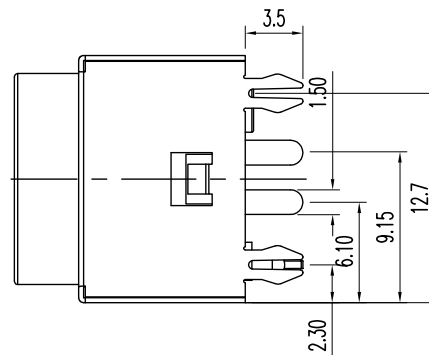
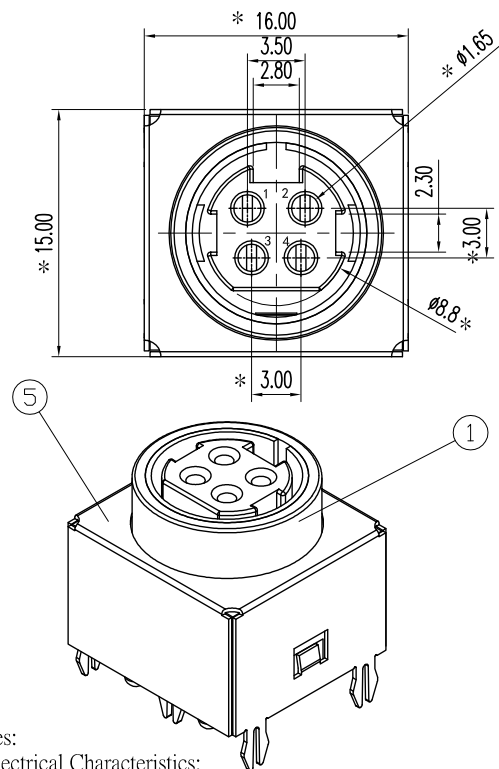


Notes:

1. Electrical Characteristics:
 - 1-1. Rating : DC 24V 1A ;
 - 1-2. Contact Resistance: 30mΩ Max.(Initial),
Between plug and contact 100mΩ Max;
(Final) After Life test: ≤60mΩ ;
 - 1-3. Dielectric Withstanding Voltage: 500V AC for One Minute ;
 - 1-4. Insulation Resistance: 100MΩ Min. Measured By 250 V DC;

2. Mechanical Characteristics:

- 2-1. Plug Insertion Force 0.5~4.5Kgf (initial),
0.5~4.5Kgf (Final) life test;
- 2-2. Plug Extraction Force: 0.5~4.5Kgf (initial),
0.5~4.5Kgf (Final) life test;

3. Durability Test: 1000 Cycles min;

4. Operating temperature:-25°C ~ +70°C;

5. Soldering Heat Resistance Wave Soldering 230°C;

6. Packaging: Tray;

5	SHELL	1	SPCC	t=0.4	MB:Cu	CuSn	PLATED
4	GROUND CONTACT	1	C2680R-H	t=0.4	MB:Cu	CuSn	PLATED
3	TERMINAL	4	C2680R-H	t=0.3	MB:Cu	Ag	PLATED
2	COVER	1	PBT		UL-94V0	(BLACK)	
1	HOUSING	1	PBT		UL-94V0	(BLACK)	
LTR	PART NAME	QTY	MATERIAL		REMARK		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.30
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDP-JDM-04-LF
SERIES T T T LEADFREE
04 WAY
METAL
DIP 180°
JACK

DESCRIPTION: POWER JACK