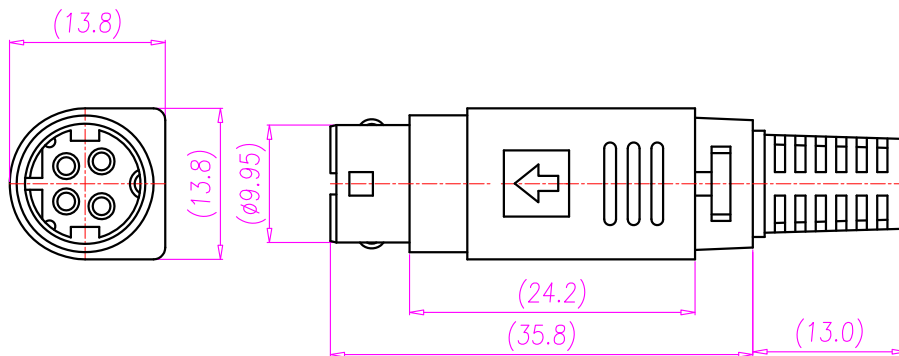


1-1. HOUSING & CONTACT ASSEMBLY

1. MATERIAL:

1-1. HOUSING: PBT, UL94V-0
CONTACT: COPPER ALLOY.

1-2. PLASTIC COVER: ABS

1-3. METAL SHELL: COPPER ALLOY, NICKEL PLATED.

1-4. METAL CAP: COPPER ALLOY, NICKEL PLATED.

1-5. CABLE FIXER: COPPER ALLOY, TIN PLATED.

1-6. POM RING: POM

1-7. SPRING: STEEL, NICKEL PLATED.

1-8. PLASTIC TUBE: ABS

1-9. SR: PVC

2. FINISH:

2-1. CONTACT: SILVER 50u"

3. ELECTRICAL SPECIFICATION :

3-1. RATED CURRENT : 7.5A/DC MAX

3-2. RATED VOLTAGE : 20V/DC MAX

4. ENVIRONMENTAL :

4-1. OPERATION TEMPERATURE : -20 ℃~85℃

MDP-PA-04D65	POWER 4PIN (M) 單箭頭黑色	0.8	6.5
P/N	DESCRIPTION	CABLE FIXER T	SR OD

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

MDP-PA-04D65-LF
SERIES | LEADFREE
OD 6.50
04WAY
ASSEMBLY
MALE

DESCRIPTION: POWER 4PIN (M)